

# MULTILAYER CERAMIC CHIP CAPACITORS

Automotive grade, MEGACAP type

## CKG series

---

### Single type

CKG32K [3.6x2.6 mm]

CKG45K [5.0x3.5 mm]


CKG57K [6.0x5.0 mm]

### Stacked type

CKG45N [5.0x3.5 mm]

CKG57N [6.0x5.0 mm]

\* Dimensions are typical values.

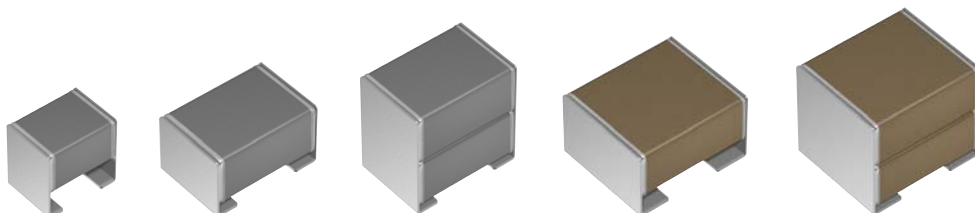

# REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

## SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

 **REMINDERS**

1. The products listed in this specification are intended for use in automotive applications under normal operation and usage conditions. The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality requires a more stringent level of safety or reliability, or whose failure, malfunction or defect could cause serious damage to society, person or property.

Please understand that we are not responsible for any damage or liability caused by use of the products in any of the applications below or for any other use exceeding the range or conditions set forth in this specification sheet. If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in this specification, please contact us.

- |  |  |
|--|--|
| (1) Aerospace/aviation equipment   | (8) Public information-processing equipment                                  |
| (2) Transportation equipment (electric trains, ships, etc.)                          | (9) Military equipment   |
| (3) Medical equipment (excepting Pharmaceutical Affairs Law classification Class1,2) | (10) Electric heating apparatus, burning equipment                           |
| (4) Power-generation control equipment   | (11) Disaster prevention/crime prevention equipment                          |
| (5) Atomic energy-related equipment  | (12) Safety equipment  |
| (6) Seabed equipment   | (13) Other applications that are not considered general-purpose applications |
| (7) Transportation control equipment   |  |

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

In addition, although the products listed in this specification are intended for use in automotive applications as described above, they are not prohibited to use in general electronic equipment, whose performance and/or quality doesn't require a more stringent level of safety or reliability, or whose failure, malfunction or defect could not cause serious damage to society, person or property. Therefore, the description of this caution will be applied, when the products are used in general electronic equipment under a normal operation and usage conditions.

- We may modify products or discontinue production of a product listed in this catalog without prior notification.
- We provide "Delivery Specification" that explain precautions for the specifications and safety of each product listed in this catalog. We strongly recommend that you exchange these delivery specifications with customers that use one of these products.
- If you plan to export a product listed in this catalog, keep in mind that it may be a restricted item according to the "Foreign Exchange and Foreign Trade Control Law". In such cases, it is necessary to acquire export permission in harmony with this law.
- Any reproduction or transferring of the contents of this catalog is prohibited without prior permission from our company.
- We are not responsible for problems that occur related to the intellectual property rights or other rights of our company or a third party when you use a product listed in this catalog. We do not grant license of these rights.
- This catalog only applies to products purchased through our company or one of our company's official agencies. This catalog does not apply to products that are purchased through other third parties.

Notice: Effective January 2013, TDK will use a new catalog number which adds product thickness and packaging specification detail. This new catalog number should be referenced on all catalog orders going forward, and is not applicable for OEM part number orders.

Please be aware the last five digits of the catalog number will differ from the item description (internal control number) on the product label.

Contact your local TDK Sales representative for more information.

(Example)

| Catalog issued date    | Catalog number        | Item description (on delivery label) |
|------------------------|-----------------------|--------------------------------------|
| Prior to January 2013  | C1608C0G1E103J(080AA) | C1608C0G1E103JT000N                  |
| January 2013 and later | C1608C0G1E103J080AA   | C1608C0G1E103JT000N                  |

# CKG series

## MEGACAP type



Type: CKG32K [3.6x2.6 mm], CKG45K [5.0x3.5 mm], CKG57K [6.0x5.0 mm],  
CKG45N [5.0x3.5 mm], CKG57N [6.0x5.0 mm]

### SERIES OVERVIEW

CKG series is a product which metal frames are attached to the terminal electrodes of MLCC. It is also referred to as MEGACAP. Because the metal frame relieves mechanical stress and thermal shock, CKG series is an extremely reliable product. In addition, the stacked type is effective in mounting area reduction because twice capacitance functions by the stacked structure.

### FEATURES


- Metal frames relieve mechanical stress and thermal shock.
- Stacked type has twice the capacitance in the same area.
- C0G type having excellent stable temperature and DC-bias characteristics is also available.
- Mounting on aluminum board is possible.
- AEC-Q200 compliant.

### APPLICATIONS

- X7r products: Smoothing and decoupling applications requiring high capacitance
- C0G products: LC resonant circuits of OBC and wireless power transfer, etc.


### SHAPE & DIMENSIONS

Single type



|   |                   |
|---|-------------------|
| L | Product length    |
| W | Product width     |
| T | Product thickness |
| E | Metal-frame width |

Stacked type



|   |                   |
|---|-------------------|
| L | Product length    |
| W | Product width     |
| T | Product thickness |
| E | Metal-frame width |

Dimensions in mm

| Type   | L         | W         | T         | E         |
|--------|-----------|-----------|-----------|-----------|
| CKG32K | 3.60±0.30 | 2.60±0.30 | 3.35±0.10 | 0.80±0.15 |
| CKG45K | 5.00±0.50 | 3.50±0.50 | 2.90±0.10 | 1.10±0.30 |
| CKG57K | 6.00±0.50 | 5.00±0.50 | 3.35±0.15 | 1.60±0.30 |
| CKG45N | 5.00±0.50 | 3.50±0.50 | 5.00±0.50 | 1.10±0.30 |
| CKG57N | 6.00±0.50 | 5.00±0.50 | 5.00±0.50 | 1.60±0.30 |

\*Dimensional tolerances are typical values.

**CATALOG NUMBER CONSTRUCTION**

|            |           |          |            |           |            |          |            |          |          |
|------------|-----------|----------|------------|-----------|------------|----------|------------|----------|----------|
| <b>CKG</b> | <b>57</b> | <b>N</b> | <b>X7R</b> | <b>1V</b> | <b>107</b> | <b>M</b> | <b>500</b> | <b>J</b> | <b>J</b> |
| (1)        | (2)       | (3)      | (4)        | (5)       | (6)        | (7)      | (8)        | (9)      | (10)     |

## (1) Series

## (2) Dimensions L x W (mm)

| Code | Length | Width | Metal-frame width |
|------|--------|-------|-------------------|
| 32   | 3.60   | 2.60  | 0.80              |
| 45   | 5.00   | 3.50  | 1.10              |
| 57   | 6.00   | 5.00  | 1.60              |

## (3) Structure

| Code | Type    |
|------|---------|
| K    | Single  |
| N    | Stacked |

## (4) Temperature characteristics

| Temperature characteristics | Temperature coefficient or capacitance change | Temperature range |
|-----------------------------|---|-------------------|
| C0G                         | 0±30ppm/°C                                    | -55 to +125°C     |
| X5R                         | ±15%  | -55 to +85°C      |
| X7R                         | ±15%  | -55 to +125°C     |
| X7S                         | ±22%  | -55 to +125°C     |
| X7T                         | +22, -33%                                     | -55 to +125°C     |

## (5) Rated voltage (DC)

| Code | Voltage (DC) |
|------|--------------|
| 1C   | 16V          |
| 1E   | 25V          |
| 1V   | 35V          |
| 1H   | 50V          |
| 2A   | 100V         |
| 2E   | 250V         |
| 2W   | 450V         |
| 2J   | 630V         |
| 3A   | 1000V        |

## (6) Nominal capacitance (pF)

The capacitance is expressed in three digit codes and in units of pico Farads (pF). The first and second digits identify the first and second significant figures of the capacitance. The third digit identifies the multiplier. R designates a decimal point.

(Example)0R5 = 0.5pF

101 = 100pF

225 = 2,200,000pF = 2.2μF

## (7) Capacitance tolerance

| Code | Tolerance |
|------|-----------|
| J    | ± 5%      |
| K    | ± 10%     |
| M    | ± 20%     |

## (8) Thickness

| Code | Thickness |
|------|-----------|
| 290  | 2.90 mm   |
| 335  | 3.35 mm   |
| 500  | 5.00 mm   |

## (9) Packaging style

| Code | Style                 |
|------|-----------------------|
| A    | 178mm reel, 4mm pitch |
| J    | 330mm reel, 8mm pitch |


## (10) Special reserved code

| Code | Description                |
|------|----------------------------|
| J    | MEGACAP (with metal frame) |

## Capacitance range chart

## CKG32K [3.6x2.6 mm], Single type

| Capacitance |      | COG         |              |              |              |              |
|-------------|------|-------------|--------------|--------------|--------------|--------------|
| (pF)        | Code | 3A<br>(1kV) | 2J<br>(630V) | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) |
| 1,000       | 102  |             |              |              |              |              |
| 1,200       | 122  |             |              |              |              |              |
| 1,500       | 152  |             |              |              |              |              |
| 1,800       | 182  |             |              |              |              |              |
| 2,200       | 222  |             |              |              |              |              |
| 2,700       | 272  |             |              |              |              |              |
| 3,300       | 332  |             |              |              |              |              |
| 3,900       | 392  |             |              |              |              |              |
| 4,700       | 472  |             |              |              |              |              |
| 5,600       | 562  |             |              |              |              |              |
| 6,800       | 682  |             |              |              |              |              |
| 8,200       | 822  |             |              |              |              |              |
| 10,000      | 103  |             |              |              |              |              |
| 15,000      | 153  |             |              |              |              |              |
| 22,000      | 223  |             |              |              |              |              |
| 33,000      | 333  |             |              |              |              |              |
| 47,000      | 473  |             |              |              |              |              |
| 68,000      | 683  |             |              |              |              |              |

Standard thickness  3.35 mm


 Background gray: These products are not recommended for new designs.

■ For details such as the catalog numbers, please refer to the capacitance range table on page 8 and after.

## Capacitance range chart

## CKG45K [5.0x3.5 mm], Single type

| Capacitance |      | COG          |              |              |
|-------------|------|--------------|--------------|--------------|
| (pF)        | Code | 2J<br>(630V) | 2W<br>(450V) | 2E<br>(250V) |
| 33,000      | 333  |              |              |              |
| 47,000      | 473  |              |              |              |
| 68,000      | 683  |              |              |              |


Standard thickness  2.90 mm

■ For details such as the catalog numbers, please refer to the capacitance range table on page 8 and after.

## Capacitance range chart

## CKG57K [6.0x5.0 mm], Single type

| Capacitance |      | C0G          |              | X7R          |              |              |             |             |             | X7S         |              |             | X7T         |              |              |              |
|-------------|------|--------------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|--------------|-------------|-------------|--------------|--------------|--------------|
| (pF)        | Code | 2J<br>(630V) | 2E<br>(250V) | 2J<br>(630V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 2A<br>(100V) | 1H<br>(50V) | 1C<br>(16V) | 2J<br>(630V) | 2W<br>(450V) | 2E<br>(250V) |
| 68,000      | 683  | ■            |              |              |              |              |             |             |             |             |              |             |             |              |              |              |
| 150,000     | 154  |              | ■            |              |              |              |             |             |             |             |              |             |             |              |              |              |
| 220,000     | 224  |              |              | ■            |              |              |             |             |             |             |              |             |             |              |              |              |
| 330,000     | 334  |              |              |              |              |              |             |             |             |             |              |             |             |              |              |              |
| 470,000     | 474  |              |              |              | ■            |              |             |             |             |             |              |             |             | ■            |              |              |
| 680,000     | 684  |              |              |              |              |              |             |             |             |             |              |             |             |              | ■            |              |
| 1,000,000   | 105  |              |              |              | ■            | ■            |             |             |             |             |              |             |             |              | ■            |              |
| 1,500,000   | 155  |              |              |              |              |              |             |             |             |             |              |             |             |              |              | ■            |
| 2,200,000   | 225  |              |              |              |              | ■            |             |             |             |             |              |             |             |              |              | ■            |
| 3,300,000   | 335  |              |              |              |              |              | ■           |             |             |             |              |             |             |              |              |              |
| 4,700,000   | 475  |              |              |              |              | ■            | ■           |             |             |             |              |             |             |              |              |              |
| 6,800,000   | 685  |              |              |              |              |              |             |             |             |             | ■            |             |             |              |              |              |
| 10,000,000  | 106  |              |              |              |              |              |             |             | ■           |             | ■            | ■           |             |              |              |              |
| 15,000,000  | 156  |              |              |              |              |              |             |             |             | ■           |              |             |             |              |              |              |
| 22,000,000  | 226  |              |              |              |              |              | ■           |             | ■           |             |              |             |             |              |              |              |
| 47,000,000  | 476  |              |              |              |              |              |             | ■           | ■           |             |              |             | ■           |              |              |              |


Standard thickness  3.35 mm

■ For details such as the catalog numbers, please refer to the capacitance range table on page 8 and after.

## Capacitance range chart

## CKG45N [5.0x3.5 mm], Stacked type

| Capacitance |      | C0G          |              |              |
|-------------|------|--------------|--------------|--------------|
| (pF)        | Code | 2J<br>(630V) | 2W<br>(450V) | 2E<br>(250V) |
| 66,000      | 663  | ■            |              |              |
| 94,000      | 943  |              | ■            |              |
| 140,000     | 144  |              |              | ■            |

Standard thickness  5.00 mm

■ For details such as the catalog numbers, please refer to the capacitance range table on page 8 and after.

## Capacitance range chart


## CKG57N [6.0x5.0 mm], Stacked type

| Capacitance |      | C0G          |              | X5R          |             |             |             | X7R          |              |              |             |             |             |             |
|-------------|------|--------------|--------------|--------------|-------------|-------------|-------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------|
| (pF)        | Code | 2J<br>(630V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) | 2J<br>(630V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) |
| 140,000     | 144  | ■            |              |              |             |             |             |              |              |              |             |             |             |             |
| 300,000     | 304  |              | ■            |              |             |             |             |              |              |              |             |             |             |             |
| 470,000     | 474  |              |              |              |             |             |             | ■            |              |              |             |             |             |             |
| 1,000,000   | 105  |              |              |              |             |             |             |              | ■            |              |             |             |             |             |
| 2,200,000   | 225  |              |              |              |             |             |             |              | ■            |              |             |             |             |             |
| 4,700,000   | 475  |              |              |              |             |             |             |              |              | ■            |             |             |             |             |
| 10,000,000  | 106  |              |              | ■            |             |             |             |              |              | ■            | ■           |             |             |             |
| 22,000,000  | 226  |              |              |              | ■           |             |             |              |              |              |             |             | ■           |             |
| 33,000,000  | 336  |              |              |              |             |             |             |              |              |              |             |             |             | ■           |
| 47,000,000  | 476  |              |              |              |             | ■           |             |              |              |              | ■           |             |             |             |
| 100,000,000 | 107  |              |              |              |             |             | ■           |              |              |              |             | ■           | ■           |             |

| Capacitance |      | X7S          |             |             |             | X7T          |              |              |
|-------------|------|--------------|-------------|-------------|-------------|--------------|--------------|--------------|
| (pF)        | Code | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) | 2J<br>(630V) | 2W<br>(450V) | 2E<br>(250V) |
| 680,000     | 684  |              |             |             |             | ■            |              |              |
| 1,000,000   | 105  |              |             |             |             | ■            |              |              |
| 1,500,000   | 155  |              |             |             |             |              | ■            |              |
| 2,200,000   | 225  |              |             |             |             |              | ■            |              |
| 3,300,000   | 335  |              |             |             |             |              |              | ■            |
| 22,000,000  | 226  | ■            | ■           |             |             |              |              |              |
| 47,000,000  | 476  |              |             | ■           |             |              |              |              |
| 100,000,000 | 107  |              |             |             | ■           |              |              |              |

Standard thickness

 5.00 mm

 Background gray: This product is not recommended for new designs.

 For details such as the catalog numbers, please refer to the capacitance range table on page 8 and after.

## MULTILAYER CERAMIC CHIP CAPACITORS



## Capacitance range table

Temperature characteristic: C0G (–55 to +125°C, 0±30ppm/°C)

| Capacitance | Dimensions (mm) | Thickness (mm) | Capacitance tolerance | Catalog number                       |                                      |                                      |                                      |                                      |
|-------------|-----------------|----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
|             |                 |                |                       | Rated voltage Edc: 1kV               | Rated voltage Edc: 630V              | Rated voltage Edc: 450V              | Rated voltage Edc: 250V              | Rated voltage Edc: 100V              |
| 1nF         | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A102J335AJ</a> |                                      |                                      |                                      |                                      |
| 1.2nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A122J335AJ</a> |                                      |                                      |                                      |                                      |
| 1.5nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A152J335AJ</a> |                                      |                                      |                                      |                                      |
| 1.8nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A182J335AJ</a> |                                      |                                      |                                      |                                      |
| 2.2nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A222J335AJ</a> |                                      |                                      |                                      |                                      |
| 2.7nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A272J335AJ</a> |                                      |                                      |                                      |                                      |
| 3.3nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A332J335AJ</a> |                                      |                                      |                                      |                                      |
| 3.9nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A392J335AJ</a> |                                      |                                      |                                      |                                      |
| 4.7nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A472J335AJ</a> |                                      |                                      |                                      |                                      |
| 5.6nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A562J335AJ</a> |                                      |                                      |                                      |                                      |
| 6.8nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A682J335AJ</a> |                                      |                                      |                                      |                                      |
| 8.2nF       | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A822J335AJ</a> |                                      |                                      |                                      |                                      |
| 10nF        | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A103J335AJ</a> |                                      |                                      |                                      |                                      |
| 15nF        | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A153J335AJ</a> |                                      |                                      |                                      |                                      |
| 22nF        | 3.6x2.6         | 3.35±0.10      | ±5%                   | <a href="#">CKG32KC0G3A223J335AJ</a> | <a href="#">CKG32KC0G2J223J335AJ</a> | <a href="#">CKG32KC0G2W223J335AJ</a> |                                      |                                      |
| 33nF        | 3.6x2.6         | 3.35±0.10      | ±5%                   |                                      | <a href="#">CKG32KC0G2J333J335AJ</a> | <a href="#">CKG32KC0G2W333J335AJ</a> | <a href="#">CKG32KC0G2E333J335AJ</a> |                                      |
|             | 5.0x3.5         | 2.90±0.10      | ±5%                   |                                      | <a href="#">CKG45KC0G2J333J290JJ</a> |                                      |                                      |                                      |
| 47nF        | 3.6x2.6         | 3.35±0.10      | ±5%                   |                                      |                                      |                                      | <a href="#">CKG32KC0G2E473J335AJ</a> |                                      |
|             | 5.0x3.5         | 2.90±0.10      | ±5%                   |                                      |                                      | <a href="#">CKG45KC0G2W473J290JJ</a> |                                      |                                      |
| 66nF        | 5.0x3.5         | 5.00±0.50      | ±5%                   |                                      | <a href="#">CKG45NC0G2J663J500JJ</a> |                                      |                                      |                                      |
| 68nF        | 3.6x2.6         | 3.35±0.10      | ±5%                   |                                      |                                      |                                      |                                      | <a href="#">CKG32KC0G2A683J335AJ</a> |
|             | 5.0x3.5         | 2.90±0.10      | ±5%                   |                                      |                                      |                                      | <a href="#">CKG45KC0G2E683J290JJ</a> |                                      |
| 94nF        | 6.0x5.0         | 3.35±0.15      | ±5%                   |                                      | <a href="#">CKG57KC0G2J683J335JJ</a> |                                      |                                      |                                      |
|             | 5.0x3.5         | 5.00±0.50      | ±5%                   |                                      |                                      | <a href="#">CKG45NC0G2W943J500JJ</a> |                                      |                                      |
| 140nF       | 5.0x3.5         | 5.00±0.50      | ±10%                  |                                      |                                      |                                      | <a href="#">CKG45NC0G2E144K500JJ</a> |                                      |
|             | 6.0x5.0         | 5.00±0.50      | ±10%                  |                                      | <a href="#">CKG57NC0G2J144K500JJ</a> |                                      |                                      |                                      |
| 150nF       | 6.0x5.0         | 3.35±0.15      | ±5%                   |                                      |                                      |                                      | <a href="#">CKG57KC0G2E154J335JJ</a> |                                      |
| 300nF       | 6.0x5.0         | 5.00±0.50      | ±5%                   |                                      |                                      |                                      | <a href="#">CKG57NC0G2E304J500JJ</a> |                                      |

■ Gray items: These products are not recommended for new designs.  
Click the part numbers for details.

## Capacitance range table

Temperature characteristic: X5R (–55 to +85°C, ±15%)

| Capacitance | Dimensions (mm) | Thickness (mm) | Capacitance tolerance | Catalog number                       |                                      |                                      |                                      |
|-------------|-----------------|----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
|             |                 |                |                       | Rated voltage Edc: 100V              | Rated voltage Edc: 50V               | Rated voltage Edc: 25V               | Rated voltage Edc: 16V               |
| 10µF        | 6.0x5.0         | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX5R2A106M500JJ</a> |                                      |                                      |                                      |
| 22µF        | 6.0x5.0         | 5.00±0.50      | ±20%                  |                                      | <a href="#">CKG57NX5R1H226M500JJ</a> |                                      |                                      |
| 47µF        | 6.0x5.0         | 5.00±0.50      | ±20%                  |                                      |                                      | <a href="#">CKG57NX5R1E476M500JJ</a> |                                      |
| 100µF       | 6.0x5.0         | 5.00±0.50      | ±20%                  |                                      |                                      |                                      | <a href="#">CKG57NX5R1C107M500JJ</a> |

■ Gray item: This product is not recommended for new designs.  
Click the part numbers for details.



## MULTILAYER CERAMIC CHIP CAPACITORS



## Capacitance range table

Temperature characteristic: X7R (–55 to +125°C, ±15%)

| Capacitance | Dimensions (mm) | Thickness (mm) | Capacitance tolerance | Catalog number                       |                                      |                                      |
|-------------|-----------------|----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|
|             |                 |                |                       | Rated voltage Edc: 630V              | Rated voltage Edc: 250V              | Rated voltage Edc: 100V              |
| 220nF       | 6.0x5.0         | 3.35±0.15      | ±10%                  | <a href="#">CKG57KX7R2J224K335JJ</a> |                                      |                                      |
|             |                 |                | ±20%                  | <a href="#">CKG57KX7R2J224M335JJ</a> |                                      |                                      |
| 470nF       | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      | <a href="#">CKG57KX7R2E474K335JJ</a> |                                      |
|             |                 |                | ±20%                  |                                      | <a href="#">CKG57KX7R2E474M335JJ</a> |                                      |
|             |                 | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX7R2J474M500JJ</a> |                                      |                                      |
|             |                 |                |                       |                                      |                                      |                                      |
| 1µF         | 6.0x5.0         | 3.35±0.15      | ±10%                  | <a href="#">CKG57KX7R2E105K335JJ</a> | <a href="#">CKG57KX7R2A105K335JJ</a> |                                      |
|             |                 |                | ±20%                  | <a href="#">CKG57KX7R2E105M335JJ</a> | <a href="#">CKG57KX7R2A105M335JJ</a> |                                      |
|             |                 | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX7R2E105M500JJ</a> |                                      |                                      |
|             |                 |                |                       |                                      |                                      |                                      |
| 2.2µF       | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      |                                      | <a href="#">CKG57KX7R2A225K335JJ</a> |
|             |                 |                | ±20%                  |                                      |                                      | <a href="#">CKG57KX7R2A225M335JJ</a> |
|             |                 | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX7R2E225M500JJ</a> | <a href="#">CKG57NX7R2A225M500JJ</a> | <a href="#">CKG57NX7R2A225K335JJ</a> |
|             |                 |                |                       |                                      |                                      |                                      |
| 3.3µF       | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      |                                      | <a href="#">CKG57KX7R2A335K335JJ</a> |
|             |                 |                | ±20%                  |                                      |                                      | <a href="#">CKG57KX7R2A335M335JJ</a> |
| 4.7µF       | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      |                                      | <a href="#">CKG57KX7R2A475K335JJ</a> |
|             |                 |                | ±20%                  |                                      |                                      | <a href="#">CKG57KX7R2A475M335JJ</a> |
|             |                 | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX7R2A475M500JJ</a> | <a href="#">CKG57NX7R2A475K335JJ</a> | <a href="#">CKG57NX7R2A475M500JJ</a> |
|             |                 |                |                       |                                      |                                      |                                      |
| 10µF        | 6.0x5.0         | 5.00±0.50      | ±20%                  |                                      |                                      | <a href="#">CKG57NX7R2A106M500JJ</a> |

Click the part numbers for details.

| Capacitance | Dimensions (mm) | Thickness (mm) | Capacitance tolerance | Catalog number                       |                                      |                                      |                                      |
|-------------|-----------------|----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
|             |                 |                |                       | Rated voltage Edc: 50V               | Rated voltage Edc: 35V               | Rated voltage Edc: 25V               | Rated voltage Edc: 16V               |
| 4.7µF       | 6.0x5.0         | 3.35±0.15      | ±10%                  | <a href="#">CKG57KX7R1H475K335JJ</a> |                                      |                                      |                                      |
|             |                 |                | ±20%                  | <a href="#">CKG57KX7R1H475M335JJ</a> |                                      |                                      |                                      |
| 10µF        | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      |                                      | <a href="#">CKG57KX7R1E106K335JJ</a> |                                      |
|             |                 |                | ±20%                  |                                      |                                      | <a href="#">CKG57KX7R1E106M335JJ</a> |                                      |
|             |                 | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX7R1H106M500JJ</a> |                                      |                                      |                                      |
|             |                 |                |                       |                                      |                                      |                                      |                                      |
| 15µF        | 6.0x5.0         | 3.35±0.15      | ±20%                  |                                      |                                      |                                      | <a href="#">CKG57KX7R1C156M335JJ</a> |
| 22µF        | 6.0x5.0         | 3.35±0.15      | ±20%                  | <a href="#">CKG57KX7R1H226M335JJ</a> |                                      | <a href="#">CKG57KX7R1E226M335JJ</a> |                                      |
|             |                 |                | ±20%                  |                                      |                                      | <a href="#">CKG57NX7R1E226M500JJ</a> |                                      |
| 33µF        | 6.0x5.0         | 5.00±0.50      | ±20%                  |                                      |                                      |                                      | <a href="#">CKG57NX7R1C336M500JJ</a> |
|             |                 |                |                       |                                      |                                      |                                      |                                      |
| 47µF        | 6.0x5.0         | 3.35±0.15      | ±20%                  |                                      | <a href="#">CKG57KX7R1V476M335JJ</a> | <a href="#">CKG57KX7R1E476M335JJ</a> |                                      |
|             |                 |                | ±20%                  | <a href="#">CKG57NX7R1H476M500JJ</a> |                                      |                                      |                                      |
| 100µF       | 6.0x5.0         | 5.00±0.50      | ±20%                  |                                      | <a href="#">CKG57NX7R1V107M500JJ</a> | <a href="#">CKG57NX7R1E107M500JJ</a> |                                      |

Click the part numbers for details.

## Capacitance range table

Temperature characteristic: X7S (–55 to +125°C, ±22%)

| Capacitance | Dimensions (mm) | Thickness (mm) | Capacitance tolerance | Catalog number                       |                                      |                                      |                                      |
|-------------|-----------------|----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
|             |                 |                |                       | Rated voltage Edc: 100V              | Rated voltage Edc: 50V               | Rated voltage Edc: 25V               | Rated voltage Edc: 16V               |
| 6.8µF       | 6.0x5.0         | 3.35±0.15      | ±10%                  | <a href="#">CKG57KX7S2A685K335JJ</a> |                                      |                                      |                                      |
|             |                 |                | ±20%                  | <a href="#">CKG57KX7S2A685M335JJ</a> |                                      |                                      |                                      |
| 10µF        | 6.0x5.0         | 3.35±0.15      | ±10%                  | <a href="#">CKG57KX7S2A106K335JJ</a> | <a href="#">CKG57KX7S1H106K335JJ</a> |                                      |                                      |
|             |                 |                | ±20%                  | <a href="#">CKG57KX7S2A106M335JJ</a> | <a href="#">CKG57KX7S1H106M335JJ</a> |                                      |                                      |
| 15µF        | 6.0x5.0         | 3.35±0.15      | ±20%                  | <a href="#">CKG57KX7S2A156M335JJ</a> |                                      |                                      |                                      |
| 22µF        | 6.0x5.0         | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX7S2A226M500JJ</a> | <a href="#">CKG57NX7S1H226M500JJ</a> |                                      |                                      |
| 47µF        | 6.0x5.0         | 3.35±0.15      | ±20%                  |                                      |                                      |                                      | <a href="#">CKG57KX7S1C476M335JJ</a> |
|             |                 |                | ±20%                  |                                      |                                      | <a href="#">CKG57NX7S1E476M500JJ</a> |                                      |
| 100µF       | 6.0x5.0         | 5.00±0.50      | ±20%                  |                                      |                                      |                                      | <a href="#">CKG57NX7S1C107M500JJ</a> |

Click the part numbers for details.

⚠ Please be sure to request delivery specifications that provide further details on the features and specifications of the products for proper and safe use.  
Please note that the contents may change without any prior notice due to reasons such as upgrading.

## Capacitance range table

Temperature characteristic: X7T (–55 to +125°C, +22, –33%)

| Capacitance | Dimensions (mm) | Thickness (mm) | Capacitance tolerance | Catalog number                       |                                      |                                      |
|-------------|-----------------|----------------|-----------------------|--------------------------------------|--------------------------------------|--------------------------------------|
|             |                 |                |                       | Rated voltage Edc: 630V              | Rated voltage Edc: 450V              | Rated voltage Edc: 250V              |
| 330nF       | 6.0x5.0         | 3.35±0.15      | ±10%                  | <a href="#">CKG57KX7T2J334K335JJ</a> |                                      |                                      |
|             |                 |                | ±20%                  | <a href="#">CKG57KX7T2J334M335JJ</a> |                                      |                                      |
| 470nF       | 6.0x5.0         | 3.35±0.15      | ±10%                  | <a href="#">CKG57KX7T2J474K335JJ</a> |                                      |                                      |
|             |                 |                | ±20%                  | <a href="#">CKG57KX7T2J474M335JJ</a> |                                      |                                      |
| 680nF       | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      | <a href="#">CKG57KX7T2W684K335JJ</a> |                                      |
|             |                 |                | ±20%                  |                                      | <a href="#">CKG57KX7T2W684M335JJ</a> |                                      |
|             |                 | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX7T2J684M500JJ</a> |                                      |                                      |
|             |                 |                |                       |                                      |                                      |                                      |
| 1µF         | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      | <a href="#">CKG57KX7T2W105K335JJ</a> |                                      |
|             |                 |                | ±20%                  |                                      | <a href="#">CKG57KX7T2W105M335JJ</a> |                                      |
|             |                 | 5.00±0.50      | ±20%                  | <a href="#">CKG57NX7T2J105M500JJ</a> |                                      |                                      |
|             |                 |                |                       |                                      |                                      |                                      |
| 1.5µF       | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      |                                      | <a href="#">CKG57KX7T2E155K335JJ</a> |
|             |                 |                | ±20%                  |                                      |                                      | <a href="#">CKG57KX7T2E155M335JJ</a> |
|             |                 | 5.00±0.50      | ±20%                  |                                      | <a href="#">CKG57NX7T2W155M500JJ</a> |                                      |
|             |                 |                |                       |                                      |                                      |                                      |
| 2.2µF       | 6.0x5.0         | 3.35±0.15      | ±10%                  |                                      |                                      | <a href="#">CKG57KX7T2E225K335JJ</a> |
|             |                 |                | ±20%                  |                                      |                                      | <a href="#">CKG57KX7T2E225M335JJ</a> |
|             |                 | 5.00±0.50      | ±20%                  |                                      | <a href="#">CKG57NX7T2W225M500JJ</a> |                                      |
|             |                 |                |                       |                                      |                                      |                                      |
| 3.3µF       | 6.0x5.0         | 5.00±0.50      | ±20%                  |                                      |                                      | <a href="#">CKG57NX7T2E335M500JJ</a> |

Click the part numbers for details.