


AC and Pulse Metallized Polypropylene Film Capacitors

MKP/MKP Radial Potted Type

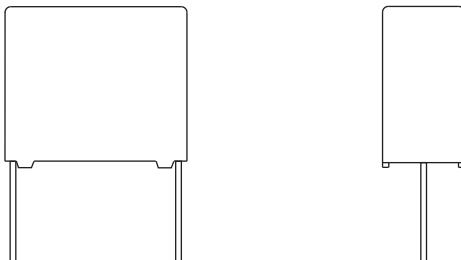

FEATURES

- 15 mm to 27.5 mm pitch
- Material categorization:
for definitions of compliance please see
www.vishay.com/doc?99912



RoHS
COMPLIANT
HALOGEN
FREE
GREEN
(5-2008)


APPLICATIONS

- Where steep pulses occur e.g. SMPS (switch mode power supplies)
- Motor control circuits

QUICK REFERENCE DATA	
Capacitance range (E24 series)	0.002 μ F to 0.68 μ F
Capacitance tolerance	$\pm 5\%$
Climatic testing class according to IEC 60068-1	55/085/56
Rated DC temperature	85 °C
Rated AC temperature	70 °C
Maximum application temperature	85 °C
Reference specifications	IEC 60384-17
Dielectric	Polypropylene film
Electrodes	Metallized film
Construction	Internal serial construction
Encapsulation	Flame retardant plastic case and epoxy resin (UL-class 94 V-0)
Leads	Tinned wire
Marking	C-value; tolerance; rated voltage; manufacturer's type designation; code for dielectric material; manufacturer's emblem; code for factory of origin; year and week of manufacture
Rated DC voltage	630 V _{DC} ; 1000 V _{DC} ; 1600 V _{DC} ; 2000 V _{DC}
Rated AC voltage	300 V _{AC} ; 400 V _{AC} ; 500 V _{AC} ; 600 V _{AC}
Rated peak-to-peak voltage	850 V; 1130 V; 1400 V; 1700 V
Performance grade	Grade 1 (long life)
Stability grade	Pitch 15 mm: grade 2 Pitch 22.5 mm and 27.5 mm: grade 1

Note

- For more detailed data and test requirements contact: dc-film@vishay.com

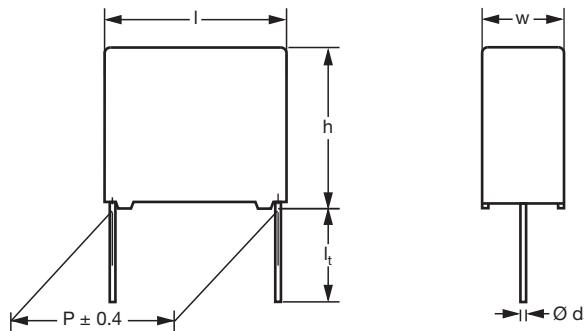DIMENSIONS in millimeters**COMPOSITION OF CATALOG NUMBER**

TYPE AND PITCHES		CAPACITANCE (numerically)					MULTIPLIER (nF)			
378		15.0 mm					0.1	2		
		22.5 mm					1	3		
		27.5 mm					10	4		
		Example: 104 = 10 x 10 = 100 nF								
		BFC2	378	XX	XX	X				
2222*		378	XX	XX	X					
* Old ordering code										
TYPE	PACKAGING	LEAD CONFIGURATION			PREFERRED TYPES					
					C-TOL.	630 V	1000 V	1600 V	2000 V	
380	Loose in box	Lead length 3.5 mm ± 0.3 mm			± 5 %	64	74	84	94	
TYPE	PACKAGING	LEAD CONFIGURATION			ON REQUEST					
378	Loose in box	Lead length 5.0 mm ± 1.0 mm			± 5 %	62	72	82	92	
	Taped on reel	H = 18.5 mm; P ₀ = 12.7 mm				65	75	85	95	

SPECIFIC REFERENCE DATA - 630 V_{DC}

DESCRIPTION	VALUE	
Tangent of loss angle: C ≤ 0.18 µF 0.2 µF ≤ C ≤ 0.3 µF 0.33 µF ≤ C ≤ 0.39 µF 0.43 µF ≤ C ≤ 0.51 µF C > 0.51 µF	at 10 kHz	at 100 kHz
	≤ 10 x 10 ⁻⁴	≤ 35 x 10 ⁻⁴
	≤ 10 x 10 ⁻⁴	≤ 45 x 10 ⁻⁴
	≤ 10 x 10 ⁻⁴	≤ 55 x 10 ⁻⁴
	≤ 10 x 10 ⁻⁴	≤ 65 x 10 ⁻⁴
	≤ 10 x 10 ⁻⁴	≤ 75 x 10 ⁻⁴
Rated voltage pulse slope (dU/dt) _R : P = 15 mm P = 22.5 mm P = 27.5 mm P = 27.5 mm	500 V/µs	
	370 V/µs	
	230 V/µs (b < 15 mm)	
	120 V/µs (b ≥ 15 mm)	
R between leads, for C ≤ 1 µF; 500 V; 1 min	> 100 000 MΩ	
R between leads and case; 500 V; 1 min	> 100 000 MΩ	
Ionization (AC) voltage (typical value) at 50 pC peak discharge	> 400 V	
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time ≤ 1000 V/s	1008 V; 1 min	
Withstanding (DC) voltage between leads and case	2840 V; 1 min	

Note(1) See "Voltage Proof Test for Metalized Film Capacitors" www.vishay.com/doc?28169**ELECTRICAL DATA AND ORDERING CODE**

U _{RDC} (V)	CAP. (µF)	DIMENSIONS w x h x l (mm)	MASS ⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING		
				LOOSE IN BOX		REEL ⁽¹⁾
				I _t = 3.5 mm ± 0.3 mm	C-TOL. = ± 5 %	ALL LEADS
				LAST 5 DIGITS OF CATALOG NUMBER	SPQ	SPQ
PITCH = 15.0 mm ± 0.4 mm; d_t = 0.60 ± 0.06 mm; U_{RAC} = 300 V; U_{p-p} = 850 V						
630	0.015	5.0 x 11.0 x 17.5	1.0	64153		
	0.016			64163		
	0.018			64183		
	0.020			64203		
	0.022			64223		
	0.024	6.0 x 12.0 x 17.5	1.4	64243		
	0.027			64273		
	0.030			64303		
	0.033			64333		
	PITCH = 15.0 mm ± 0.4 mm; d_t = 0.80 ± 0.08 mm; U_{RAC} = 300 V; U_{p-p} = 850 V					
	0.036	6.0 x 12.0 x 17.5	1.8	64363		
	0.039			64393		
	0.043			64433		
	0.047			64473		
	0.051	7.0 x 13.0 x 17.5	2.4	64513		
PITCH = 22.5 mm ± 0.4 mm; d_t = 0.80 ± 0.08 mm; U_{RAC} = 300 V; U_{p-p} = 850 V						
0.056	6.0 x 15.5 x 26.0	2.4	64563			
0.062			64623			
0.068			64683			
0.075			64753			
0.082			64823			
0.091			64913			
0.10		3.8	64104			
0.11	7.0 x 16.5 x 26.0	3.8	64114			
0.12			64124			
0.13			64134			
0.15	8.5 x 18.0 x 26.0	6.8	64154			
0.16			64164			
0.18			64184			

ELECTRICAL DATA AND ORDERING CODE								
U _{RDC} (V)	CAP. (μ F)	DIMENSIONS w x h x l (mm)	MASS ⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING				
				LOOSE IN BOX				
				$l_t = 3.5 \text{ mm} \pm 0.3 \text{ mm}$	REEL ⁽¹⁾			
				C-TOL. = $\pm 5 \%$	ALL LEADS			
LAST 5 DIGITS OF CATALOG NUMBER				SPQ	SPQ			
PITCH = 27.5 mm ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm; $U_{RAC} = 300 \text{ V}$; $U_{p-p} = 850 \text{ V}$								
630	0.20	9.0 x 19.0 x 31.5	7.4	64204	100			
	0.22			64224				
	0.24			64244				
	0.27			64274				
	0.30	11.0 x 21.0 x 31.0	9.2	64304	100			
	0.33			64334				
	0.36			64364				
	0.39			64394				
	0.43	13.0 x 23.0 x 31.0	12.3	64434	100			
	0.47			64474				
	0.51			64514				
	0.56	15.0 x 25.0 x 31.5	16.1	64564	100			
	0.62			64624				
	0.68			64684				

Notes

(1) H = in-tape height; P_0 = sprocket hole distance; for detailed specifications refer to packaging information

(2) Weight for short lead product only

- SPQ = Standard Packing Quantity

SPECIFIC REFERENCE DATA - 1000 V _{DC}					
DESCRIPTION		VALUE			
Tangent of loss angle: $C \leq 0.051 \mu\text{F}$ $0.056 \mu\text{F} \leq C \leq 0.22 \mu\text{F}$		at 10 kHz	at 100 kHz		
		$\leq 10 \times 10^{-4}$	$\leq 20 \times 10^{-4}$		
Rated voltage pulse slope (dU/dt) _R :					
P = 15 mm P = 22.5 mm P = 27.5 mm P = 27.5 mm		1300 V/μs 1200 V/μs 600 V/μs ($b < 15 \text{ mm}$) 300 V/μs ($b \geq 15 \text{ mm}$)			
R between leads, for $C \leq 1 \mu\text{F}$; 500 V; 1 min		$> 100 000 \text{ M}\Omega$			
R between leads and case; 500 V; 1 min		$> 100 000 \text{ M}\Omega$			
Ionization (AC) voltage (typical value) at 50 pC peak discharge		$> 500 \text{ V}$			
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time $\leq 1000 \text{ V/s}$		1600 V; 1 min			
Withstanding (DC) voltage between leads and case		2840 V; 1 min			

Note

(1) See "Voltage Proof Test for Metallized Film Capacitors" www.vishay.com/doc?28169

ELECTRICAL DATA AND ORDERING CODE							
U_{RDC} (V)	CAP. (μF)	DIMENSIONS w x h x l (mm)	MASS⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING			
				LOOSE IN BOX			
				I_t = 3.5 mm \pm 0.3 mm	REEL⁽¹⁾		
				C-TOL. = \pm 5 %	ALL LEADS		
		LAST 5 DIGITS OF CATALOG NUMBER		SPQ	SPQ		
PITCH = 15.0 mm \pm 0.4 mm; d_t = 0.60 \pm 0.06 mm; U_{RAC} = 300 V; U_{p-p} = 1130 V							
1000	0.0030	5.0 x 11.0 x 17.5	1.0	74302			
	0.0033			74332			
	0.0036			74362			
	0.0039			74392			
	0.0043			74432			
	0.0047	6.0 x 12.0 x 17.5	1.4	74472	1000		
	0.0051			74512	1100		
	0.0056			74562			
	0.0062			74622			
	0.0068			74682			
1000	0.0075			74752			
	0.0082		1.4	74822			
	0.0091			74912			
	0.010	6.0 x 12.0 x 17.5	1.4	74103	1000		
	0.011			74113	900		
1000	PITCH = 22.5 mm \pm 0.4 mm; d_t = 0.80 \pm 0.08 mm; U_{RAC} = 300 V; U_{p-p} = 1130 V						
	0.012	6.0 x 15.5 x 26.0	2.4	74123			
	0.013			74133			
	0.015			74153			
	0.016			74163			
	0.018	7.0 x 16.5 x 26.0	3.8	74183			
	0.020			74203			
	0.022			74223			
	0.024			74243			
	0.027			74273			
1000	0.030	7.0 x 16.5 x 26.0	3.8	74303	200		
	0.033			74333	450		
	0.036			74363			
	0.039			74393			
	0.043			74433			
	0.047	8.5 x 18.0 x 26.0	6.8	74473	200		
	0.051			74513	350		
1000	PITCH = 27.5 mm \pm 0.4 mm; d_t = 0.80 \pm 0.08 mm; U_{RAC} = 300 V; U_{p-p} = 1130 V						
	0.056	9.0 x 19.0 x 31.5	7.4	74563			
	0.062			74623			
	0.068			74683			
	0.075			74753			
	0.082	11.0 x 21.0 x 31.5	9.2	74823			
	0.091			74913			
	0.10			74104	100		
	0.11			74114			
1000	0.12	13.0 x 23.0 x 31.0	12.3	74124			
	0.13			74134	100		
	0.15			74154			
	0.16			74164			
	0.18	15.0 x 25.0 x 31.5	16.1	74184			
	0.20			74204	100		
	0.22	18.0 x 28.0 x 31.5		74224			

Notes(1) H = in-tape height; P₀ = sprocket hole distance; for detailed specifications refer to packaging information

(2) Weight for short lead product only

- SPQ = Standard Packing Quantity

SPECIFIC REFERENCE DATA - 1600 V_{DC}		
DESCRIPTION		VALUE
Tangent of loss angle: C \leq 0.022 μ F 0.024 μ F \leq C \leq 0.1 μ F	at 10 kHz	at 100 kHz
	$\leq 10 \times 10^{-4}$	$\leq 15 \times 10^{-4}$ $\leq 10 \times 10^{-4}$ $\leq 20 \times 10^{-4}$
Rated voltage pulse slope (dU/dt) _R : P = 22.5 mm P = 27.5 mm P = 27.5 mm		1600 V/ μ s 900 V/ μ s (b < 15 mm) 450 V/ μ s (b \geq 15 mm)
R between leads, for C \leq 1 μ F; 500 V; 1 min		> 100 000 M Ω
R between leads and case; 500 V; 1 min		> 100 000 M Ω
Ionization (AC) voltage (typical value) at 20 pC peak discharge		> 600 V
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time \leq 1000 V/s		2560 V; 1 min
Withstanding (DC) voltage between leads and case		2840 V; 1 min

Note(1) See "Voltage Proof Test for Metallized Film Capacitors" www.vishay.com/doc?28169

ELECTRICAL DATA AND ORDERING CODE						
U_{RDC} (V)	CAP. (μ F)	DIMENSIONS w x h x l (mm)	MASS ⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING		
				LOOSE IN BOX		
				$I_t = 3.5 \text{ mm} \pm 0.3 \text{ mm}$	REEL ⁽¹⁾	
				C-TOL. = $\pm 5\%$	ALL LEADS	
1600	0.0056 0.0062 0.0068 0.0075 0.0082	6.0 x 15.5 x 26.0	2.4	84562 84622 84682	300	
				84752 84822 84912 84103	550	
				84113 84123 84133 84153 84163	450	
				84183 84203 84223	350	
				PITCH = 27.5 mm ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm; $U_{RAC} = 500$ V; $U_{p-p} = 1400$ V		
	0.024 0.027 0.030 0.033 0.036	9.0 x 19.0 x 31.5	7.4	84243 84273 84303 84333 84363	100	
				84393 84433 84473 84513	100	
				84563 84623 84683	100	
				84753 84823 84913	100	
				84104		
	0.039 0.043	11.0 x 21.0 x 31.0	9.2	PITCH = 22.5 mm ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm; $U_{RAC} = 500$ V; $U_{p-p} = 1400$ V		
	0.047 0.051			84563 84623 84683		
	0.056 0.062 0.068			84753 84823 84913		
	0.075 0.082 0.091	13.0 x 23.0 x 31.0	16.1	PITCH = 22.5 mm ± 0.4 mm; $d_t = 0.80 \pm 0.08$ mm; $U_{RAC} = 500$ V; $U_{p-p} = 1400$ V		
	0.10			84104		

Notes(1) H = in-tape height; P_0 = sprocket hole distance; for detailed specifications refer to packaging information

(2) Weight for short lead product only

- SPQ = Standard Packing Quantity

SPECIFIC REFERENCE DATA - 2000 V_{DC}		
DESCRIPTION	VALUE	
Tangent of loss angle: $C \leq 0.051 \mu F$	at 10 kHz $\leq 10 \times 10^{-4}$	at 100 kHz $\leq 15 \times 10^{-4}$
Rated voltage pulse slope (dU/dt) _R : $P = 22.5 \text{ mm}$ $P = 27.5 \text{ mm}$ $P = 27.5 \text{ mm}$		2000 V/μs 1200 V/μs ($b < 15 \text{ mm}$) 600 V/μs ($b \geq 15 \text{ mm}$)
R between leads, for $C \leq 1 \mu F$; 500 V; 1 min		$> 100\,000 \text{ M}\Omega$
R between leads and case; 500 V; 1 min		$> 100\,000 \text{ M}\Omega$
Ionization (AC) voltage (typical value) at 20 pC peak discharge		$> 600 \text{ V}$
Withstanding (DC) voltage (cut off current 10 mA) ⁽¹⁾ ; rise time $\leq 1000 \text{ V/s}$		3200 V; 1 min
Withstanding (DC) voltage between leads and case		2840 V; 1 min

Note

⁽¹⁾ See "Voltage Proof Test for Metallized Film Capacitors" www.vishay.com/doc?28169

ELECTRICAL DATA AND ORDERING CODE							
U_{RDC} (V)	CAP. (μF)	DIMENSIONS $w \times h \times l$ (mm)	MASS⁽²⁾ (g)	CATALOG NUMBER BFC2 378 AND PACKAGING			
				LOOSE IN BOX			
				$I_t = 3.5 \text{ mm} \pm 0.3 \text{ mm}$	REEL⁽¹⁾		
				$C\text{-TOL.} = \pm 5 \%$	$H = 18.5 \text{ mm};$ $P_0 = 12.7 \text{ mm}$		
		LAST 5 DIGITS OF CATALOG NUMBER		SPQ	SPQ		
PITCH = 22.5 mm $\pm 0.4 \text{ mm}$; $d_t = 0.80 \pm 0.08 \text{ mm}$; $U_{RAC} = 600 \text{ V}$; $U_{p-p} = 1700 \text{ V}$							
2000	0.0033	6.0 x 12.0 x 26.0	2.4	94332 94362	300 600		
	0.0036			94392			
	0.0039		2.9	94432			
	0.0043			94472			
	0.0047			94512			
	0.0051	7.0 x 16.5 x 26.0		94562			
	0.0056		3.8	94622			
	0.0062			94682			
	0.0068			94752			
	0.0075	8.5 x 18.0 x 26.0		94822			
	0.0082		6.8	94912			
	0.0091			94103			
	0.010			94113			
	0.011			94123			
PITCH = 27.5 mm $\pm 0.4 \text{ mm}$; $d_t = 0.80 \pm 0.08 \text{ mm}$; $U_{RAC} = 600 \text{ V}$; $U_{p-p} = 1700 \text{ V}$							
	0.013	9.0 x 19.0 x 31.5	7.4	94133	100		
	0.015			94153			
	0.016			94163			
	0.018	11.0 x 21.0 x 31.0	9.2	94183	100		
	0.020			94203			
	0.022			94223			
	0.024			94243			
	0.027			94273			
	0.030	13.0 x 23.0 x 31.0	12.3	94303	100		
	0.033			94333			
	0.036			94363			
	0.039	15.0 x 25.0 x 31.5	16.1	94393	100		
	0.043			94433			
	0.047			94473			
	0.051	18.0 x 28.0 x 31.5		94513			





Notes

⁽¹⁾ H = in-tape height; P_0 = sprocket hole distance; for detailed specifications refer to packaging information


⁽²⁾ Weight for short lead product only

- SPQ = Standard Packing Quantity


MAXIMUM RMS VOLTAGE (SINEWAVE) AS A FUNCTION OF FREQUENCY

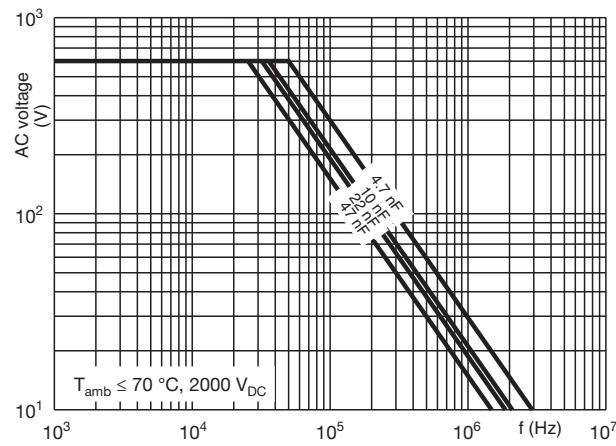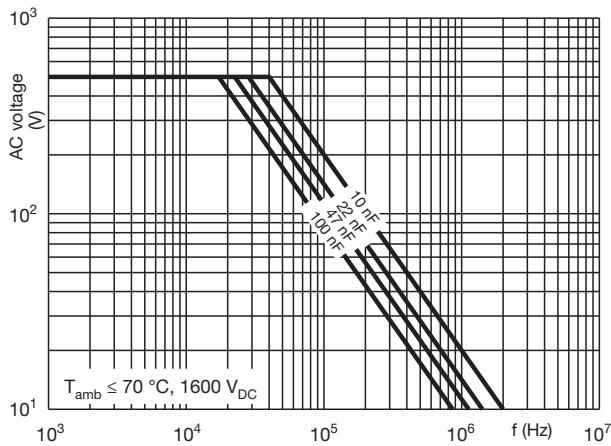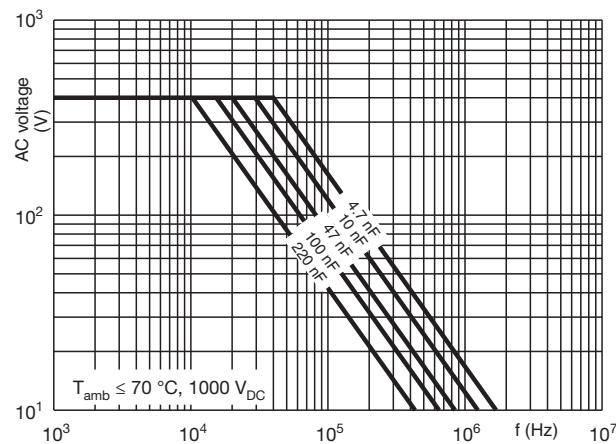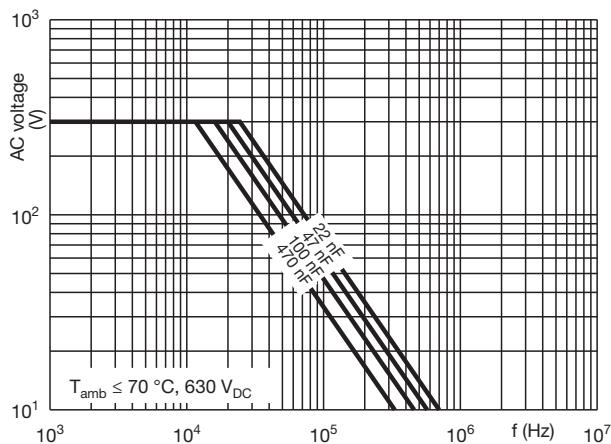

CAPACITANCE

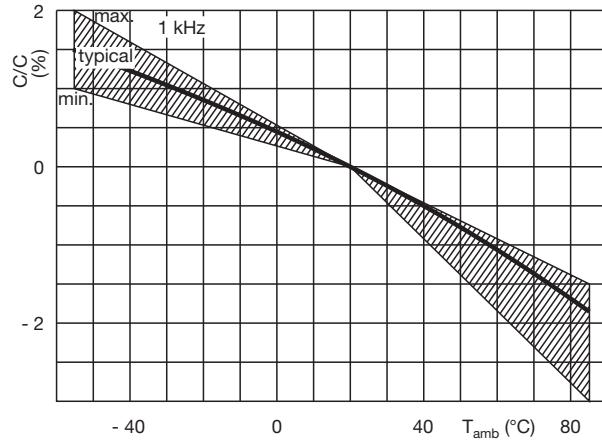

IMPEDANCE

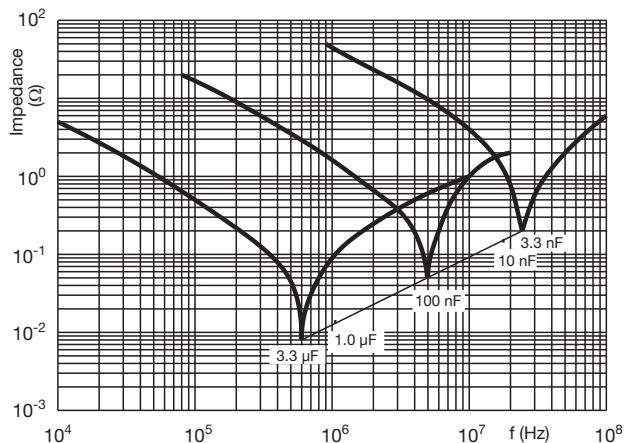

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.