





Optocoupler, Phototransistor Output, Dual Channel, SOIC-8 Package



i179074



FEATURES

- Dual channel coupler
- SOIC-8 surface mountable package
- Standard lead spacing of 0s.05"
- Available only on tape and reel option (conforms to EIA standard 481-2)
- Isolation test voltage, 4000 V_{RMS}
- Compatible with dual wave, vapor phase and IR reflow soldering
- Material categorization: for definitions of compliance please see www.vishay.com/doc?99912



RoHS
COMPLIANT

LINKS TO ADDITIONAL RESOURCES



DESCRIPTION

The VOD205T, VOD206T, VOD207T, VOD211T, VOD213T, VOD217T are optically coupled pairs with a GaAs infrared LED and a silicon NPN phototransistor. Signal information, including a DC level, can be transmitted by the device while maintaining a high degree of electrical isolation between input and output.

AGENCY APPROVALS

- [UL](#)
- [cUL](#)
- [DIN EN 60747-5-5 \(VDE 0884-5\)](#), approved, contact customer service if this option is required

| ORDERING INFORMATION | | | | | | |
|----------------------------|----------|-----------|------------|---------|----------------------|----------------------|
| V | O | D | 2 | # | # | T |
| PART NUMBER | | | | | | |
| | | | | | | |
| AGENCY CERTIFIED / PACKAGE | CTR (%) | | | | | |
| UL, cUL, VDE, CQC | 40 to 80 | 63 to 125 | 100 to 200 | > 20 | > 100 ⁽¹⁾ | > 100 ⁽²⁾ |
| SOIC-8 | VOD205T | VOD206T | VOD207T | VOD211T | VOD213T | VOD217T |

Notes

- Additional options may be possible, please contact sales office.
- ⁽¹⁾ I_F = 10 mA
- ⁽²⁾ I_F = 1 mA



| ABSOLUTE MAXIMUM RATINGS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified) | | | | |
|--|---------------------------|-------------|-------------|------------------------|
| PARAMETER | TEST CONDITION | SYMBOL | VALUE | UNIT |
| INPUT | | | | |
| Peak reverse voltage | | V_R | 6 | V |
| Peak pulsed current | 1 μs , 300 pps | I_{FM} | 1 | A |
| Continuous forward current per channel | | I_F | 30 | mA |
| Power dissipation | | P_{diss} | 50 | mW |
| Derate linearly from 25 $^{\circ}\text{C}$ | | | 0.66 | mW/ $^{\circ}\text{C}$ |
| OUTPUT | | | | |
| Collector emitter breakdown voltage | | BV_{CEO} | 70 | V |
| Emitter collector breakdown voltage | | BV_{ECO} | 7 | V |
| Continuous output current | | $I_{Cmax.}$ | 50 | mA |
| Power dissipation per channel | | P_{diss} | 125 | mW |
| Derate linearly from 25 $^{\circ}\text{C}$ | | | 1.67 | mW/ $^{\circ}\text{C}$ |
| COUPLER | | | | |
| Isolation test voltage | t = 1 s | V_{ISO} | 4000 | V_{RMS} |
| Total package dissipation ambient (2 LEDs and 2 detectors, 2 channels) | | P_{tot} | 300 | mW |
| Derate linearly from 25 $^{\circ}\text{C}$ | | | 4 | mW/ $^{\circ}\text{C}$ |
| Storage temperature | | T_{stg} | -40 to +150 | $^{\circ}\text{C}$ |
| Operating temperature | | T_{amb} | -40 to +100 | $^{\circ}\text{C}$ |
| Soldering time from 260 $^{\circ}\text{C}$ ⁽¹⁾ | | T_{sld} | 10 | s |

Notes

- Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of this document. Exposure to absolute maximum ratings for extended periods of the time can adversely affect reliability.
- Refer to reflow profile for soldering conditions for surface mounted devices

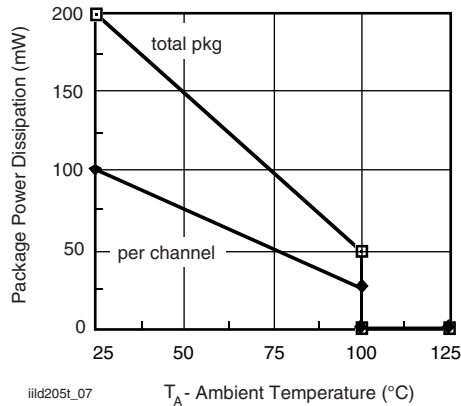


Fig. 1 - Power Dissipation vs. Ambient Temperature



| ELECTRICAL CHARACTERISTICS (T _{amb} = 25 °C, unless otherwise specified) | | | | | | | |
|---|---|------|--------------------|------|------|------|------|
| PARAMETER | TEST CONDITION | PART | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| INPUT | | | | | | | |
| Forward voltage | I _F = 10 mA | | V _F | - | 1.2 | 1.55 | V |
| Reverse current | V _R = 6 V | | I _R | - | 0.1 | 100 | μA |
| Capacitance | V _R = 0 V | | C _O | - | 25 | - | pF |
| OUTPUT | | | | | | | |
| Collector emitter breakdown voltage | I _C = 100 μA | | BV _{CEO} | 70 | - | - | V |
| Emitter collector breakdown voltage | I _E = 100 μA | | BV _{ECO} | 7 | - | - | V |
| Collector emitter leakage current | V _{CE} = 10 V, I _F = 0 A | | I _{CCEO} | - | 5 | 50 | nA |
| Collector emitter capacitance | V _{CE} = 0 V | | C _{CCE} | - | 10 | - | pF |
| Collector emitter saturation voltage | I _F = 10 mA, I _C = 2.5 mA | | V _{CEsat} | - | - | 0.4 | V |
| COUPLER | | | | | | | |
| Capacitance (input to output) | | | C _{IO} | - | 0.5 | - | pF |

Note

- Minimum and maximum values were tested requirements. Typical values are characteristics of the device and are the result of engineering evaluations. Typical values are for information only and are not part of the testing requirements.

| CURRENT TRANSFER RATIO | | | | | | | |
|--------------------------------|---|---------|-------------------|------|------|------|------|
| PARAMETER | TEST CONDITION | PART | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| I _C /I _F | V _{CE} = 5 V, I _F = 10 mA | VOD205T | CTR _{DC} | 40 | - | 80 | % |
| | | VOD206T | CTR _{DC} | 63 | - | 125 | % |
| | | VOD207T | CTR _{DC} | 100 | - | 200 | % |
| | | VOD211T | CTR _{DC} | 20 | - | - | % |
| | | VOD213T | CTR _{DC} | 100 | - | - | % |
| | V _{CE} = 5 V, I _F = 1 mA | VOD205T | CTR _{DC} | 13 | 30 | - | % |
| | | VOD206T | CTR _{DC} | 22 | 45 | - | % |
| | | VOD207T | CTR _{DC} | 34 | 70 | - | % |
| | | VOD217T | CTR _{DC} | 100 | 120 | - | % |

| SWITCHING CHARACTERISTICS | | | | | | | |
|---------------------------|--|------------------|------|------|------|------|--|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT | |
| Turn-on time | I _C = 2 mA, R _L = 100 Ω, V _{CC} = 5 V | t _{on} | - | 5 | - | μs | |
| Turn-off time | I _C = 2 mA, R _L = 100 Ω, V _{CC} = 5 V | t _{off} | - | 4 | - | μs | |
| Rise time | I _C = 2 mA, R _L = 100 Ω, V _{CC} = 5 V | t _r | - | 5 | - | μs | |
| Fall time | I _C = 2 mA, R _L = 100 Ω, V _{CC} = 5 V | t _f | - | 4 | - | μs | |

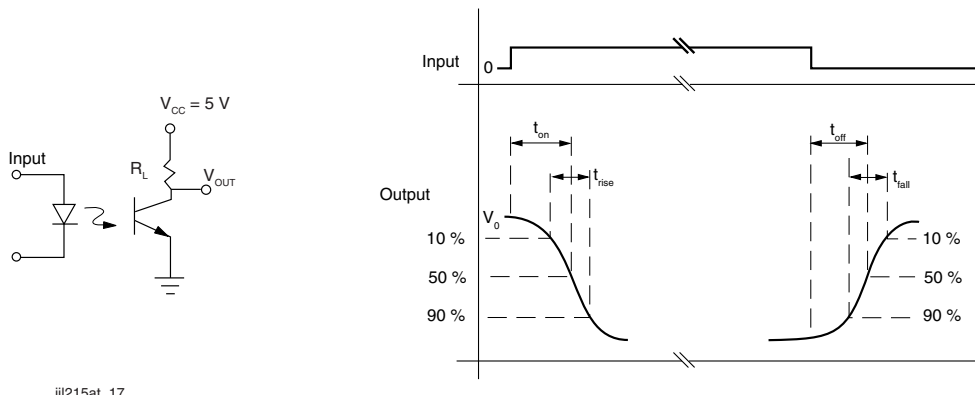


Fig. 2 - Switching Test Circuit

| COMMON MODE TRANSIENT IMMUNITY | | | | | | |
|--|--|------------|------|--------|------|-----------|
| PARAMETER | TEST CONDITION | SYMBOL | MIN. | TYP. | MAX. | UNIT |
| Common mode transient immunity at logic high | $V_{CM} = 1000 V_{P-P}$, $R_L = 1 k\Omega$, $I_F = 0 mA$ | $ C_{MH} $ | - | 10 000 | - | $V/\mu s$ |
| Common mode transient immunity at logic low | $V_{CM} = 1000 V_{P-P}$, $R_L = 1 k\Omega$, $I_F = 10 mA$ | $ C_{ML} $ | - | 10 000 | - | $V/\mu s$ |

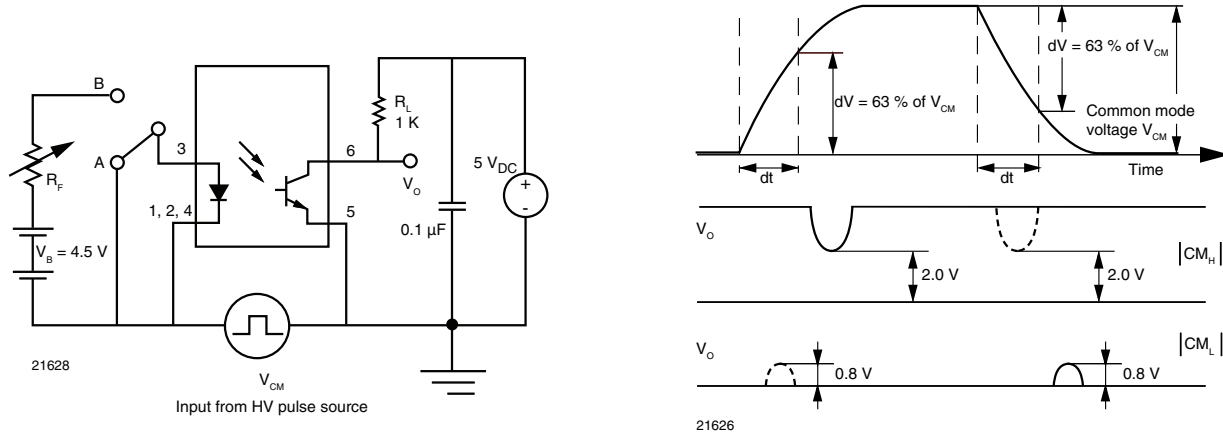



Fig. 3 - Test Circuit for Common Mode Transient Immunity

| SAFETY AND INSULATION RATINGS ($T_{amb} = 25\text{ }^\circ\text{C}$, unless otherwise specified) | | | | |
|--|--|------------|----------------|------------------|
| PARAMETER | TEST CONDITION | SYMBOL | VALUE | UNIT |
| Climatic classification | According to IEC 68 part 1 | | 40 / 100 / 21 | |
| Pollution degree | According to DIN VDE 0109 | | 2 | |
| Comparative tracking index | Insulation group IIIa | CTI | 175 | |
| Maximum rated withstanding isolation voltage | According to UL1577, $t = 1 \text{ min}$ | V_{ISO} | 3333 | V_{RMS} |
| Tested withstanding isolation voltage | According to UL1577, $t = 1 \text{ s}$ | V_{ISO} | 4000 | V_{RMS} |
| Maximum transient isolation voltage | According to DIN EN 60747-5-5 | V_{IOTM} | 6000 | V_{peak} |
| Maximum repetitive peak isolation voltage | According to DIN EN 60747-5-5 | V_{IORM} | 560 | V_{peak} |
| Isolation resistance | $T_{amb} = 25\text{ }^\circ\text{C}$, $V_{IO} = 500 \text{ V}$ | R_{IO} | $\geq 10^{12}$ | Ω |
| | $T_{amb} = 100\text{ }^\circ\text{C}$, $V_{IO} = 500 \text{ V}$ | R_{IO} | $\geq 10^{11}$ | Ω |
| Output safety power | | P_{SO} | 350 | mW |
| Input safety current | | I_{SI} | 150 | mA |
| Input safety temperature | | T_S | 165 | $^\circ\text{C}$ |
| Creepage distance | | | ≥ 4 | mm |
| Clearance distance | | | ≥ 4 | mm |
| Insulation thickness | | DTI | ≥ 0.2 | mm |

Note

- As per IEC 60747-5-5, §7.4.3.8.2, this optocoupler is suitable for “safe electrical insulation” only within the safety ratings. Compliance with the safety ratings shall be ensured by means of protective circuits.

TYPICAL CHARACTERISTICS ($T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified)

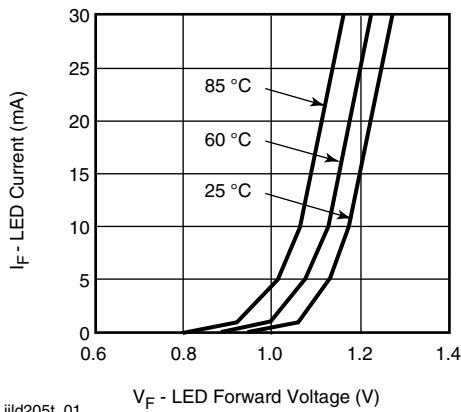

iiid205t_01

Fig. 4 - Forward Current vs. Forward Voltage



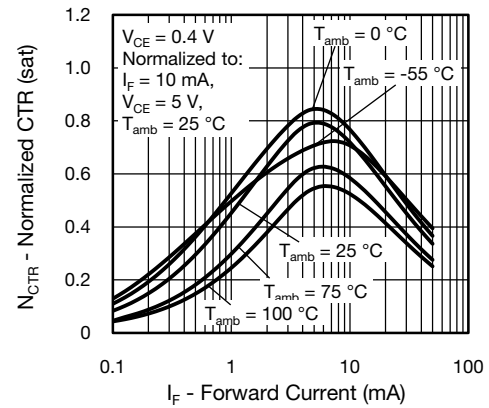


Fig. 7 - Normalized CTR (saturated) vs. Forward Current

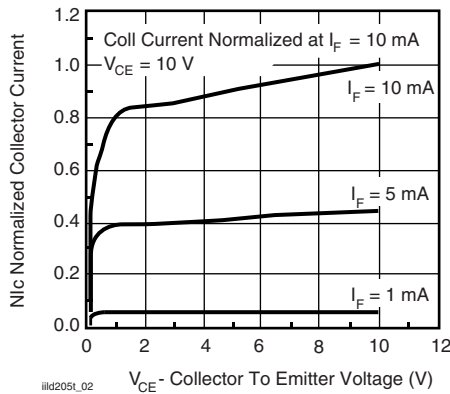

iiid205t_02

Fig. 5 - Collector Emitter Current vs. V_{CE}

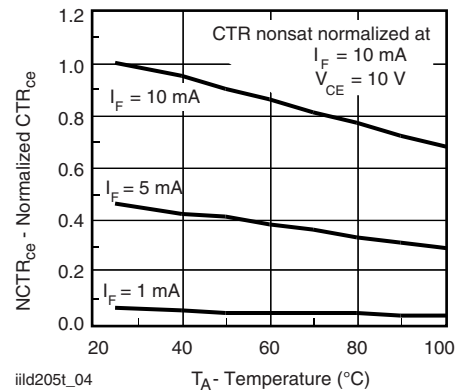

iiid205t_04

Fig. 8 - Current Transfer Ratio (normalized) vs. Ambient Temperature


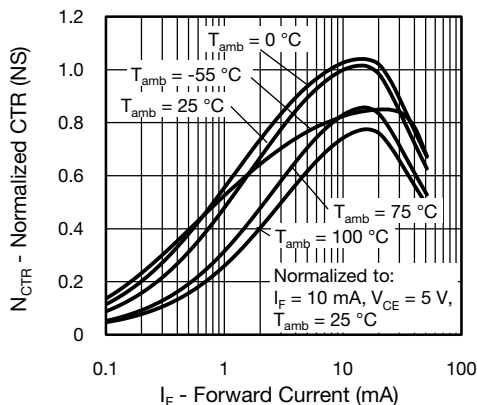


Fig. 6 - Normalized CTR (non-saturated) vs. Forward Current

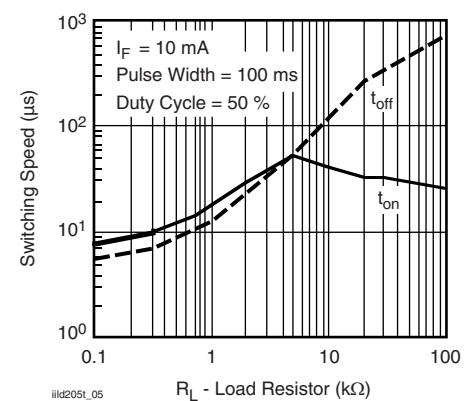

iiid205t_05

Fig. 9 - Switching Speed vs. Load Resistor







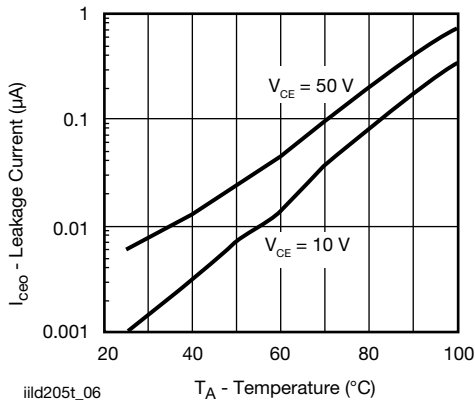


Fig. 10 - Collector Current vs. Ambient Temperature

PACKAGE DIMENSIONS (in millimeters)

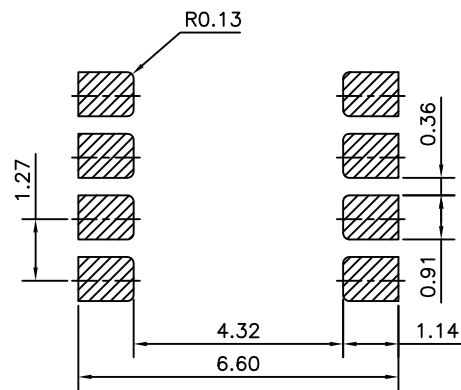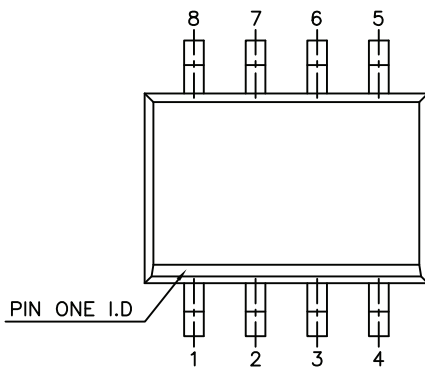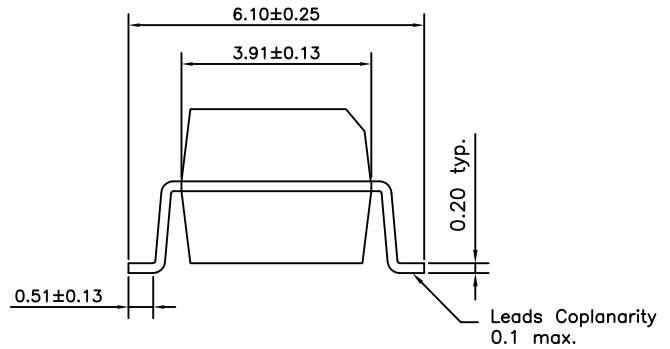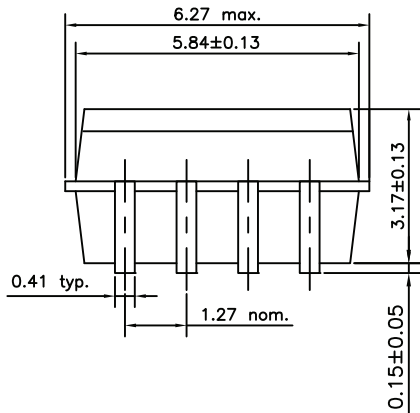

PACKAGE MARKING (example of VOD207T)



Notes

- XXXX = LMC (lot marking code)
- Tape and reel suffix (T) is not part of the package marking

TAPE AND REEL PACKAGING

Dimensions in millimeters

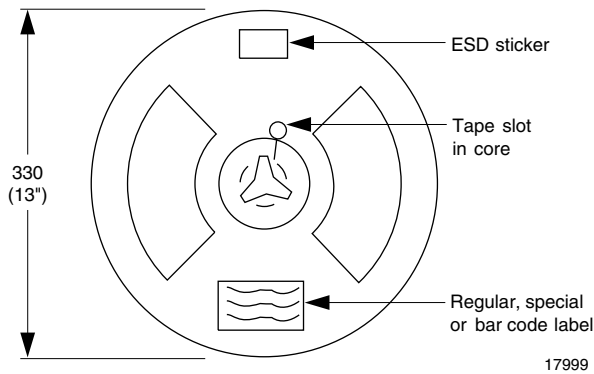


Fig. 11 - Tape and Reel Shipping Medium (EIA-481, revision A, and IEC 60286), 2000 Units per Reel

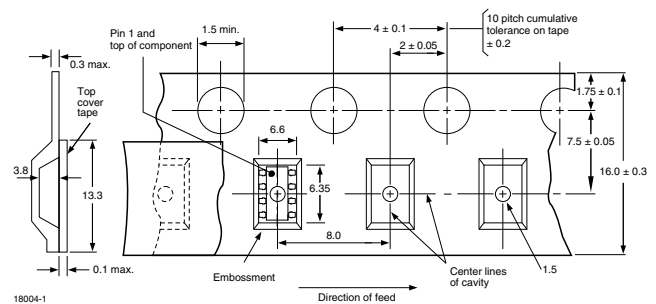


Fig. 12 - Tape Dimensions, 2000 Parts per Reel

SOLDER PROFILE

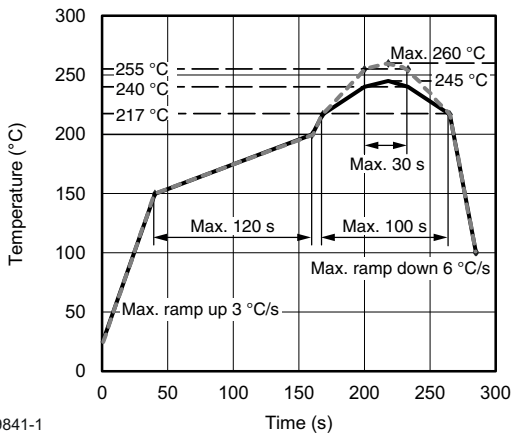


Fig. 13 - Lead (Pb)-free Reflow Solder Profile according to J-STD-020

HANDLING AND STORAGE CONDITIONS

ESD level: HBM class 2

Floor life: unlimited

Conditions: $T_{amb} < 30\text{ °C}$, $RH < 85\%$

Moisture sensitivity level 1, according to J-STD-020



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Vishay products are not designed for use in life-saving or life-sustaining applications or any application in which the failure of the Vishay product could result in personal injury or death unless specifically qualified in writing by Vishay. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.