


FLEXIBLE ELEVATED & SELF-NESTING SOCKETS

(2.00 mm) .0787" PITCH • ESQT/ESQT (-368)/PTHF SERIES

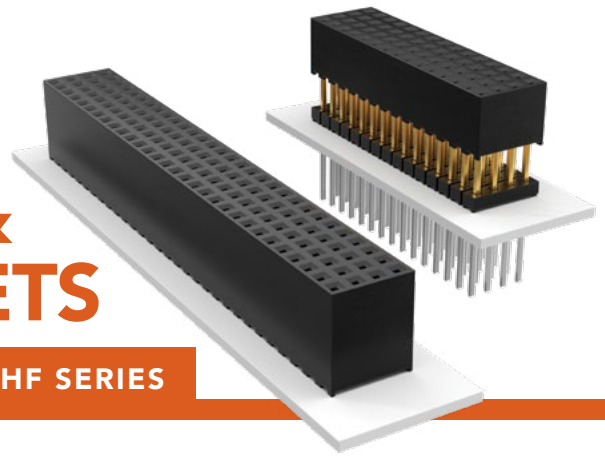

ESQT

Board Mates:
TMMH, TMM, MTMM, MMT, TW, LTMM, ZLTMM, ESQT, PTT, TSH, TMMS

Cable Mates:
TCMD

SPECIFICATIONS

Insulator Material:
Black Liquid Crystal Polymer

Contact Material:
Phosphor Bronze

Plating:
Sn or Au over 50 μ" (1.27 μm) Ni

Current Rating (ESQT/TMMH):
4.5 A per pin (2 pins powered)

Operating Temp Range:
-55 °C to +125 °C

Insertion Depth:
(2.62 mm) .103" to (5.03 mm) .198" with (0.38 mm) .015" wipe

Max Cycles:
100 with 10 μ" (0.25 μm) Au

Lead-Free Solderable:
Yes, for -S, -D & -Q (Wave only for -T, -5 & -6)

ESQT	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	BODY HEIGHT	OTHER OPTION
------	---	------------------	------------	----------------	------------	-------------	--------------

02 thru 50

Specify LEAD STYLE from chart

-F
= Gold flash on contact, Matte Tin on tail

-L
= 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail

-M
= 20 μ" (0.51 μm) Gold on contact, Matte Tin on tail

-GF
= 15 μ" (0.38 μm) Gold on contact, Gold flash on tail (Recommended for self-nesting) (-02 lead style only)

-S
= Single Row

-D
= Double Row

-T
= Triple Row

-Q
= Quad Row

-5
= Five Row



-6
= Six Row

"XXX"
= Body Height (in inches)

(7.87 mm) .310" minimum for -S, -D, -Q

(9.53 mm) .375" minimum for -T, -5, -6

"XXX"
= Polarized Position (Indicate position number)

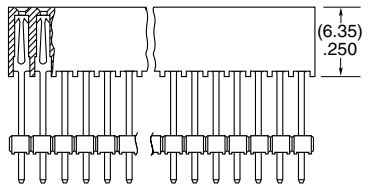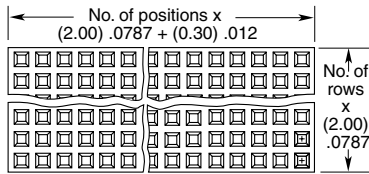

LEAD STYLE	A	MAX TAIL	MAX BODY HEIGHT
-02	(21.59) .850	(13.72) .540	(20.32) .800
-03	(11.63) .458	(3.76) .148	(10.36) .408



ESQT (-368)/PTHF

Mates:
ESQT, PTHF

SPECIFICATIONS

Insulator Material:
Black Liquid Crystal Polymer (ESQT-368)
Black High Temp Nylon (PTHF)

Contact Material:
Phosphor Bronze

Plating:
Au or Sn over 50 μ" (1.27 μm) Ni

Operating Temp Range:
-55 °C to +125 °C

Max Cycles:
100 with 10 μ" (0.25 μm) Au

Lead-Free Solderable:
Yes (ESQT-368)

SERIES	1	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	Q	368
--------	---	------------------	------------	----------------	---	-----



ESQT
= Solder Tails

PTHF
= Press-fit Tails


Specify LEAD STYLE from chart

-GF
= 15 μ" (0.38 μm) Gold on contact, Gold flash on tail (-02 Lead Style only)

-M
= 20 μ" (0.51 μm) Gold on contact, Matte Tin on tail (-03 Lead Style only)

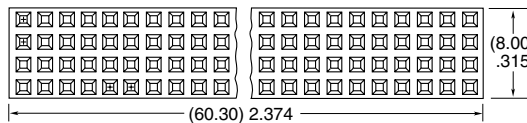

LEAD STYLE	ESQT		PTHF	
	A	B	A	B
-02	(21.59) .850	(12.24) .482	(21.59) .850	(12.24) .482
-03	(11.63) .458	(2.29) .090	(12.34) .486	(3.00) .118

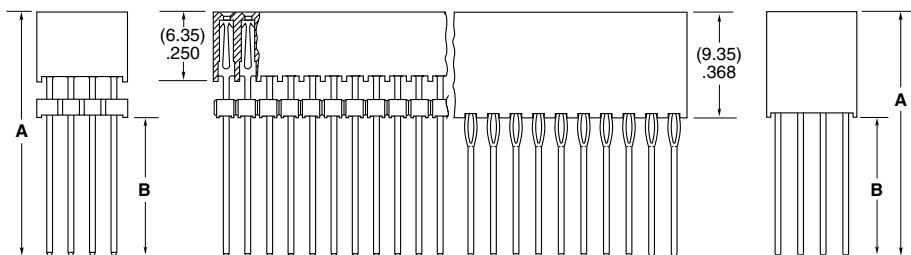

ESQT (-368) SERIES

PTHF SERIES

TOOLING

Press-Fit
CAT-PT-130-A-4
For more information, visit www.samtec.com/tooling

Note:
This Series is non-standard, non-returnable.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[ESQT-140-03-S-T-375](#) [ESQT-135-03-L-D-325](#) [ESQT-102-03-M-D-310](#) [ESQT-117-02-L-D-150](#) [ESQT-104-02-F-S-580](#) [ESQT-112-03-S-D-309](#) [ESQT-104-02-M-S-309](#) [ESQT-103-02-M-D-600](#) [ESQT-144-03-F-D-335](#) [ESQT-110-03-M-S-368](#) [ESQT-110-02-M-Q-800](#) [ESQT-116-03-M-T-375](#) [ESQT-107-02-M-D-500](#) [ESQT-103-03-M-S-408](#) [ESQT-102-02-M-D-750](#) [ESQT-102-02-G-D-360](#) [ESQT-110-02-F-D-735](#) [ESQT-150-02-L-D-752](#) [ESQT-103-02-M-D-750](#) [ESQT-103-02-M-S-750](#) [ESQT-150-03-F-Q-375](#) [ESQT-108-03-M-D-355](#) [ESQT-124-02-H-6-511](#) [ESQT-130-02-L-D-760](#) [ESQT-103-02-F-S-500](#) [ESQT-115-02-M-D-437](#) [ESQT-150-02-L-D-384](#)