


VH CONNECTOR

3.96 mm pitch/Wire-to-Board connectors/Crimp style and Mating style

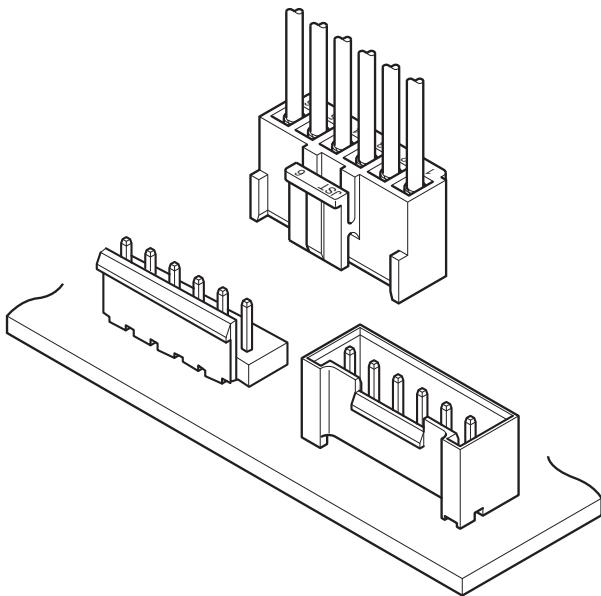

This wire-to-board connector with a 3.96 mm pitch is commonly used in power supply circuits for a wide variety of electrical and electronic devices. It supports currents up to 10 A.

- **Compact size, high current capability**
Compact design with a mounting height of 16.5 mm and a depth of 10.5 mm (for top-entry type), combined with a high current rating of 10 A (when using AWG #16 wire).
- **Box-shaped leaf spring contact**
The contact is highly reliable, featuring a leaf-shaped design with excellent spring characteristics housed within a box.
- **Secure lock mechanism**
The large, highly visible outer-type housing with a strong lock ensures easy and secure insertion and removal. Additionally, it offers excellent mechanical reliability in the mated condition.

■ Specifications

- Current rating: 10 A AC/DC

*When using AWG #16 with the standard type header.

7A AC/DC

*When using AWG #18 with the shrouded type header.

Note: Do not branch in parallel current which exceeds the rated current.

If branched in parallel, current imbalance or other problems may occur.

If it is absolutely necessary to branch such a large current in parallel, design the circuits without causing any imbalance and provide extra margin for each circuit.

- Voltage rating: 250 V AC/DC

- Temperature range: -40°C to +105°C

(including temperature rise in applying electrical current)

- Contact resistance: Initial value/ 10 mΩ max.

After test/ 20 mΩ max.

- Insulation resistance: 1,000 MΩ min.

- Withstanding voltage:

There shall be no breakdown or flashover while applying 1,500 VAC for one minute.

- Applicable wire range:

Conductor size/ AWG #22 to AWG #16

Insulation O.D./ ϕ 1.7 mm to ϕ 3.0 mm

- Applicable PC board thickness: 1.6 mm

* Please refer to the "Handling Precautions for Terminals and Connectors" on our website (listed in the "Technical Documents" column on the Product Information page) before use.

* RoHS2 compliance

* Dimensional unit: mm


* Contact JST for details.

■ Standards

For information on overseas standard registrations, please refer to the "List of Registered Overseas Standards" on our website (listed in the "Technical Documents" column on the Product Information page).

* Specifications registered to overseas standards may differ from the general specifications listed above.

Contact

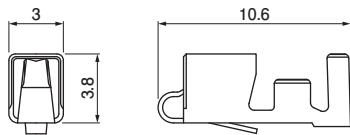

Model No.	Applicable wire range		Q'ty/reel
	Conductor size AWG (mm ²)	Insulation O.D. (mm)	
SVH-21T-P1.1	#22 to #18 (0.33 to 0.83)	1.7 to 3.0	4,500
SVH-41T-P1.1	#20 to #16 (0.5 to 1.25)	1.7 to 3.0	3,500

Material and Surface finish, etc.

Copper alloy, tin-plated




Note: When using the retainer mountable type housing, the applicable wire insulation outer diameter is ϕ 1.7 to ϕ 2.2.

Crimping machine

Contact	Crimping machine	Applicator	Crimp applicator with dies
SVH-21T-P1.1	AP-K2N	MKS-L	APLMK SVH21-11
SVH-41T-P1.1			APLMK SVH41-11

Note: Contact JST for fully automatic crimping applicator.

Housing

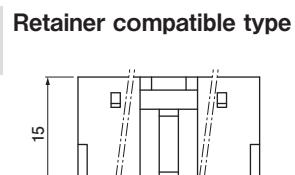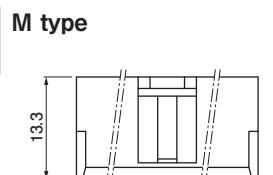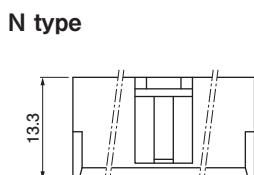


No. of circuits	Model No.			Dimensions (mm)		Q'ty/bag	
	N type	M type	Retainer compatible type	A	B	N type M type	Retainer compatible type
2	VHR-2N	VHR-2M	VHRR-2N ^{Note 2}	3.96	7.86	1,000	1,000
3	VHR-3N	VHR-3M	VHRR-3N	7.92	11.82	1,000	500
4	VHR-4N	VHR-4M	—	11.88	15.78	1,000	1,000
5	VHR-5N	VHR-5M	VHRR-5N	15.84	19.74	1,000	500
6	VHR-6N	VHR-6M	—	19.80	23.70	500	500
7	VHR-7N	VHR-7M	VHRR-7N	23.76	27.66	500	500
8	VHR-8N	—	VHRR-8N	27.72	31.62	500	500
9	VHR-9N	VHR-9M	VHRR-9N	31.68	35.58	500	500
10	VHR-10N	—	—	35.64	39.54	500	500
11	VHR-11N	—	—	39.60	43.50	500	500

Material and Surface finish, etc.

PA, natural (white)

Note: 1. With the M type, the exposed contact lances from the N type are covered by resin which is integrally formed and molded into the housing body as a single unit, further improving electrical safety.
 2. Please note that the retainer mountable type housing for 2 circuits can only be used with the standard type header. It cannot be used with the shrouded type header.
 3. For flame retardant grade of resin material used, please refer to the "List of Registered Overseas Standards" on our website (listed in the "Technical Documents" column on the Product Information page).

Retainer

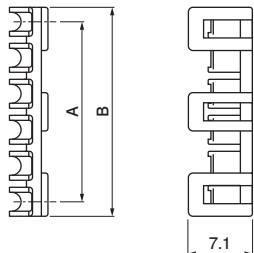

No. of circuits	Model No.	Dimensions (mm)		Q'ty/bag
		A	B	
2	VHS-2V	3.7	6.9	1,000
3	VHS-3V	7.52	10.72	1,000
5	VHS-5V	15.44	18.64	1,000
7	VHS-7V	23.36	26.56	1,000
8	VHS-8V	27.32	30.52	1,000
9	VHS-9V	31.28	34.48	1,000


Material and Surface finish, etc.

PA (GF), natural (ivory)


Note: For flame retardant grade of resin material used, please refer to the "List of Registered Overseas Standards" on our website (listed in the "Technical Documents" column on the Product Information page).

Header (Standard type)


Top entry type

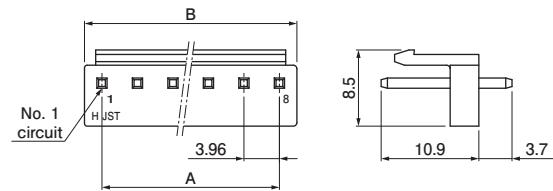


Side entry type

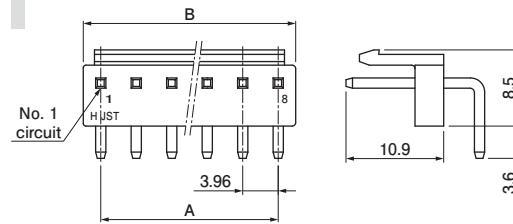

Top entry type with PBT

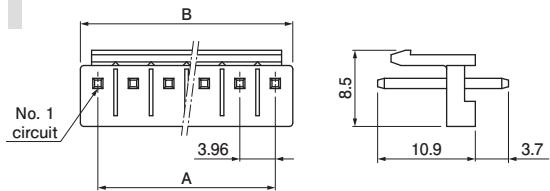

Side entry type with stopper

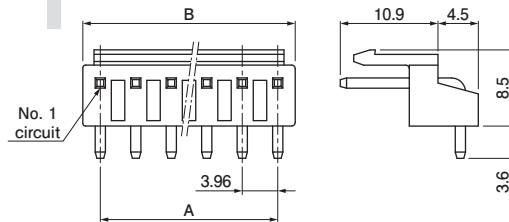

No. of circuits	Model No.				Dimensions (mm)		Q'ty/box	
	Top entry type ^{Note2}	Side entry type ^{Note2}	Top entry type with PBT	Side entry type with stopper	A	B	Top entry type	Side entry type
2	B2P-VH	B2PS-VH	B2P-VH-B	S2P-VH	3.96	7.86	1,000	1,000
3	B3P-VH	B3PS-VH	B3P-VH-B	S3P-VH	7.92	11.82	1,000	500
4	B4P-VH	B4PS-VH	B4P-VH-B	S4P-VH	11.88	15.78	500	500
5	B5P-VH	B5PS-VH	B5P-VH-B	S5P-VH	15.84	19.74	500	250
6	B6P-VH	B6PS-VH	B6P-VH-B	S6P-VH	19.80	23.70	250	250
7	B7P-VH	B7PS-VH	B7P-VH-B	S7P-VH	23.76	27.66	250	250
8	B8P-VH	B8PS-VH	B8P-VH-B	—	27.72	31.62	200	200
9	B9P-VH	B9PS-VH	B9P-VH-B	—	31.68	35.58	200	200
10	B10P-VH	B10PS-VH	B10P-VH-B	—	35.64	39.54	200	100
11	—	—	B11P-VH-B	—	39.60	43.50	200	—

Material and Surface finish, etc.

Post: Copper alloy, tin-plated

Base housing: Non-PBT/ PA, natural (white)

PBT/ PBT (GF), natural (white)


Note: 1. This product displays (LF)(SN) on a label.

2. Headers with posts omitted are also available. Please contact JST for further details.


3. For flame retardant grade of resin material used, please refer to the "List of Registered Overseas Standards" on our website (listed in the "Technical Documents" column on the Product Information page).

Header (Shrouded Header)

<2, 3 circuits>

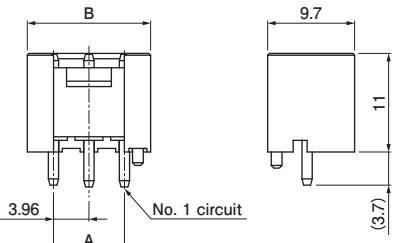

<4 to 10 circuits>

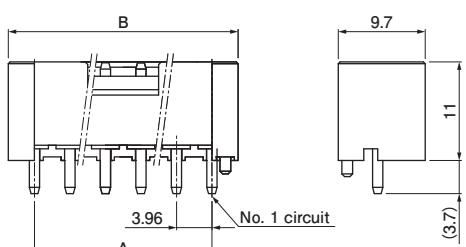

No. of circuits	Model No.	Dimensions (mm)		Q'ty/box
		A	B	
2	B2P-VH-FB-B ^{Note2}	3.96	9.8	250
3	B3P-VH-FB-B	7.92	13.76	200
4	B4P-VH-FB-B	11.88	17.72	150
5	B5P-VH-FB-B	15.84	21.68	200
6	B6P-VH-FB-B	19.80	25.64	200
7	B7P-VH-FB-B	23.76	29.60	100
8	B8P-VH-FB-B	27.72	33.56	100
9	B9P-VH-FB-B	31.68	37.52	100
10	B10P-VH-FB-B	35.64	41.48	125


Material and Surface finish, etc.

Post: Copper alloy, tin-plated
Base housing: PBT (GF), natural (white)


Note: 1. This product displays (LF)(SN) on a label.
2. The housings that mate with the two position are the N-type and M-type.
Please note that retainer mountable type cannot be used.
3. For flame retardant grade of resin material used, please refer to the "List of Registered Overseas Standards" on our website (listed in the "Technical Documents" column on the Product Information page).

PC board layout and Assembly layout

Top entry type

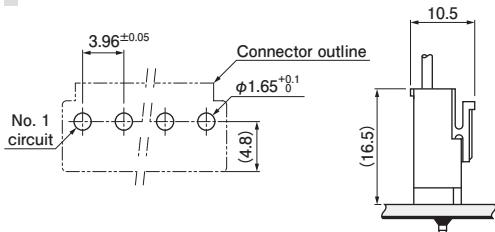


Side entry type

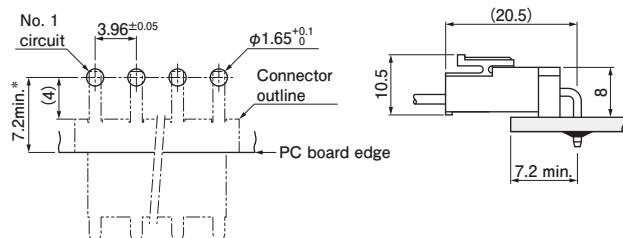


* 11.0 max when used with the VR connector socket

Side entry type with stopper

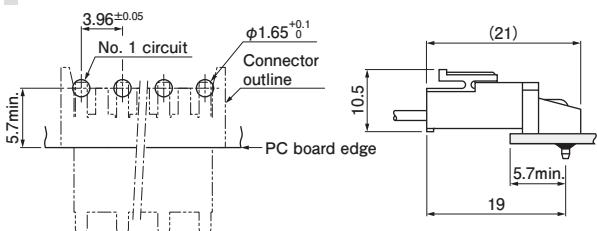


Shrouded Header

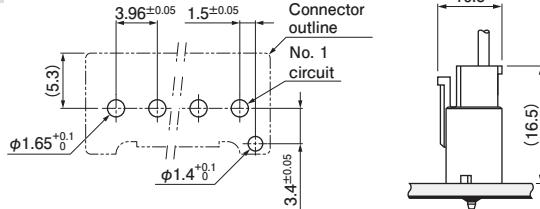

Note: 1. The PC board layout figure is viewed from the connector mounting surface.
2. Tolerance for the PCB hole pitch shall be ± 0.05 and shall not accumulate.
3. Hole dimensions differ depending on the type of PCB and PCB drilling method.
The above dimensions are for reference only. Please contact JST for further details.
4. The assembly layout is for N-type housings.
For housings other than N-type, please contact JST.

Model number allocation

Contact

	
Supply form: S···Strip form	B···Loose piece
Series name	
Applicable wire range:	
21···AWG #22 to AWG #18	
41···AWG #20 to AWG #16	
Surface finish: Tin-plated	
Material: Copper alloy	
Applicable post size	

Housing/ N type, M type

	
Series name	
Type: For receptacle contact	
No. of circuits	
Shape: N···Contact lance exposed	
M···Contact lance covered by resin	
Color: No indication···Natural (White), BK···Black, R···Red,	
BL···Blue, M···Green, D···Orange, Y···Yellow, PK···Pink,	
H···Gray	

Housing/ Retainer compatible type

	
Series name	
Type: For receptacle contact	
Retainer compatible type	
No. of circuits	
Shape: Contact lance exposed	
Color: No indication···Natural (White)	

Retainer

	
Series name	
Type: Retainer	
No. of circuits	
Sub model number	


Header (Standard type)

	
Assembly product	
No. of circuits	
Header type: No indication···Top entry type	
S···Side entry type	
Series name	
Color: No indication···Natural (White), BK···Black, R···Red,	
BL···Blue, M···Green, O···Orange, Y···Yellow, PK···Pink,	
H···Gray, TR···Tomato red	

Header (Standard type)/ Top entry type with PBT

	
Assembly product	
No. of circuits	
Series name	
Material: PBT (GF)	
Color: No indication···Natural (White), C···Black, R···Red,	
E···Blue, M···Green, Y···Yellow	

Header (Standard type)/ Side entry type with stopper

	
Header type: Side entry type with stopper	
No. of circuits	
Series name	
Color: No indication···Natural (White), BK···Black,	
Red, BL···Blue, M···Green, Y···Yellow	

Header (Shrouded Header)

	
Assembly product	
No. of circuits	
Series name	
Sub model number	
Material: PBT (GF)	
Color: No indication···Natural (White), C···Black, R···Red,	
E···Blue, M···Green, O···Orange, Y···Yellow,	
PK···Pink, H···Gray,	

Model number allocation

Headers with posts omitted (standard type)

1) Polarized header (N-1) with post omitted

However, this only applies when 4 posts or more are used

B*1P*2-VH

Circuit No.	1	2	3	4	5	6	7
Circuit (post)	○	○	○	○	○	×	○
Model No.	B6P7-VH						

○: with post
×: without post

2) Polarized header with circuit No. 2 post omitted

However, this only applies when 4 posts or more are used

B*1P*2-VH-L

Circuit No.	1	2	3	4	5	6	7
Circuit (post)	○	×	○	○	○	○	○
Model No.	B6P7-VH-L						

○: with post
×: without post

3) Header with pitch size doubled by omitting even numbered posts

However, this only applies if the total number of circuits (including circuits without posts) is an odd number.

①Header with pitch size doubled (7.92 mm)

B*1P*2-VH

Circuit No.	1	2	3	4	5	6	7
Circuit (post)	○	×	○	×	○	×	○
Model No.	B4P7-VH						

○: with post
×: without post

②Header with pitch size tripled (11.88 mm)

B*1P*2-VH

Circuit No.	1	2	3	4	5	6	7
Circuit (post)	○	×	×	○	×	×	○
Model No.	B3P7-VH						

○: with post
×: without post

③Header with pitch size quadrupled (15.84 mm)

B*1P*2-VH

Circuit No.	1	2	3	4	5	6	7	8	9
Circuit (post)	○	×	×	×	○	×	×	×	○
Model No.	B3P9-VH								

○: with post
×: without post

Note) *1: Actual number of circuits (actual number of posts)

*2: Total number of circuits (including post-omitted circuits)