


MICRO BOARD STACKER

(1.27 mm) .050" PITCH • DWM/HDWM SERIES

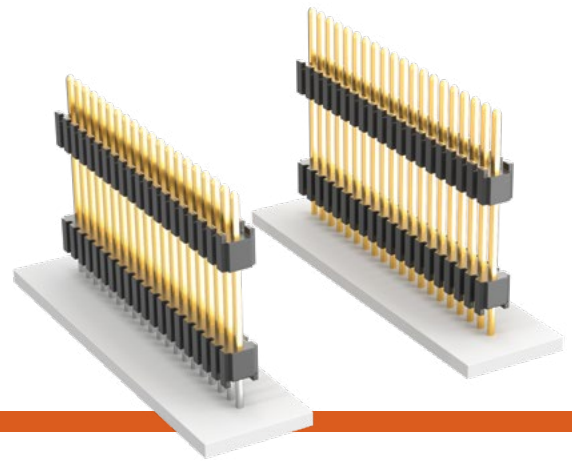

DWM/HDWM

Mates:
SMS, SLM, RSM

SPECIFICATIONS

Insulator Material:
Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze
Plating:
Au or Sn over 50 μ" (1.27 μm) Ni
Operating Temp Range:
-55 °C to +105 °C with Tin
-55 °C to +125 °C with Gold

PROCESSING

Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0.15 mm) .006" max*
*(.004" stencil solution may be available; contact ipg@samtec.com)

ALSO AVAILABLE

Other Platings
(MOQ Required)

DWM	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	OTHER OPTION
	01 thru 50	Specify LEAD STYLE from chart	-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail -G = 10 μ" (0.25 μm) Gold on contact, Gold flash on tail	-S = Single Row -D = Double Row	- "XXX" = Stacker Height Example: -200 = (5.08 mm) .200"	- "XXX" = Polarized Position (Specify position of omitted pin)

OAL	
LEAD STYLE	THROUGH-HOLE
-01	(11.43) .450
-51	(10.41) .410
-52	(10.80) .425
-53	(12.83) .505
-54	(14.10) .555
-55	(15.49) .610
-56	(15.88) .625
-57	(16.51) .650
-58	(17.91) .705
-59	(19.18) .755
-60	(20.96) .825
-61	(26.67) 1.050

HDWM	NO. PINS PER ROW	LEAD STYLE	PLATING OPTION	ROW OPTION	STACKER HEIGHT	OTHER OPTION
	01 thru 50	Specify LEAD STYLE from chart	-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail -G = 10 μ" (0.25 μm) Gold on contact, Gold flash on tail	-S = Single Row -D = Double Row	- "XXX" = Stacker Height Example: -250 = (6.35 mm) .250"	- "XXX" = Polarized Position (Specify position of omitted pin) - SM = Surface Mount (02 thru 40 positions only) - A = Alignment Pin (6 positions minimum -D only) Metal or plastic at Samtec discretion (Not available with -LC) - LC = Locking Clip (5 positions minimum -D only) (Not available with -A) (Manual placement required) - P = Pick & Place Pad

OAL		
LEAD STYLE	THROUGH-HOLE	SURFACE MOUNT
-01	(11.43) .450	(8.38) .330
-51	(10.41) .410	—
-52	(10.80) .425	—
-53	(12.83) .505	(9.78) .385
-54	(14.10) .555	(11.05) .435
-55	(15.49) .610	(12.45) .490
-56	(15.88) .625	(12.83) .505
-57	(16.51) .650	(13.46) .530
-58	(17.91) .705	(14.86) .585
-59	(19.18) .755	(15.62) .615
-60	(20.96) .825	—
-61	(26.67) 1.050	—

Notes:
For added mechanical stability, Samtec recommends mechanical board spacers be used in applications with gold or selective gold plated connectors. Contact ipg@samtec.com for more information.

This Series is non-standard, non-returnable.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Samtec:](#)

[HDWM-05-51-G-S-200](#) [HDWM-03-60-S-D-547](#) [HDWM-06-51-G-S-200](#) [HDWM-03-60-L-S-585](#) [HDWM-03-55-G-D-385](#) [HDWM-02-01-L-S-250-SM](#) [HDWM-07-01-L-S-200](#) [HDWM-20-61-S-D-590](#) [HDWM-08-56-S-D-312-SM-P](#) [HDWM-25-60-S-D-490](#) [HDWM-20-60-S-D-545](#) [HDWM-10-58-G-D-330-SM-LC-P](#) [HDWM-20-53-S-D-250-SM-P](#) [HDWM-20-58-S-D-385-SM](#) [HDWM-19-55-G-D-350](#) [HDWM-27-58-L-D-390-SM](#) [HDWM-10-61-S-D-590](#) [HDWM-22-61-S-D-590](#) [HDWM-25-55-G-D-390-SM](#) [HDWM-03-57-L-S-200](#) [HDWM-20-54-S-D-251](#) [HDWM-05-58-L-D-430-SM](#) [HDWM-13-56-G-D-340-SM](#) [HDWM-11-58-S-D-409-SM-LC-P](#) [HDWM-04-57-L-D-250-SM](#) [HDWM-06-60-L-D-547](#) [HDWM-10-01-L-S-250-SM](#) [HDWM-05-55-G-S-400](#) [HDWM-14-55-S-D-325-SM-P](#) [HDWM-08-58-L-S-390-SM](#) [HDWM-02-59-G-S-495](#) [HDWM-05-58-G-S-472](#) [HDWM-10-58-G-S-472](#) [HDWM-14-57-G-D-393-SM](#) [HDWM-14-53-G-S-255-SM](#) [HDWM-23-53-G-D-255-SM-A](#) [HDWM-40-53-S-S-250-SM](#) [HDWM-50-53-G-D-280-SM-A](#) [HDWM-50-53-S-D-280-SM-A](#) [HDWM-50-59-S-D-545-SM](#) [HDWM-34-01-S-D-330-SM](#) [HDWM-36-55-G-D-315-SM](#) [HDWM-36-58-S-D-475-SM](#) [HDWM-36-59-G-D-495-SM](#) [HDWM-37-57-S-D-350-SM](#) [HDWM-38-53-G-D-280-SM-A](#) [HDWM-40-60-S-D-500](#) [HDWM-45-53-S-D-280-SM-A](#) [HDWM-03-54-G-S-340](#) [HDWM-06-54-S-D-400-SM](#) [HDWM-06-57-S-D-400-SM](#) [HDWM-06-58-G-D-400-SM](#) [HDWM-08-01-S-D-250-SM](#) [HDWM-09-53-S-D-280-SM-A](#) [HDWM-10-53-G-D-280-SM-A](#) [HDWM-10-59-G-D-430-SM](#) [HDWM-12-52-T-S-200](#) [HDWM-15-55-G-D-315-SM](#) [HDWM-15-59-G-D-355-SM](#) [HDWM-16-59-S-D-500-SM](#) [HDWM-18-58-G-D-465-SM](#) [HDWM-20-54-G-D-310-SM](#) [HDWM-21-53-S-D-280-SM-A](#) [HDWM-25-53-S-D-280-SM-A](#) [HDWM-25-54-G-D-260-SM](#) [HDWM-25-59-S-D-430-SM](#) [HDWM-25-59-S-D-450](#) [HDWM-25-59-S-D-469-SM-A](#) [HDWM-27-53-S-D-280-SM-A](#) [HDWM-27-55-S-D-355-SM](#) [HDWM-30-54-S-D-250-SM](#) [HDWM-30-57-S-D-250-SM](#) [HDWM-30-57-S-D-295-SM-P](#) [HDWM-31-53-S-D-280-SM-A](#) [HDWM-32-58-G-D-380-SM-LC](#) [HDWM-32-59-G-D-545-SM](#) [HDWM-36-01-T-D-280](#) [HDWM-36-57-S-D-254-SM](#) [HDWM-36-57-S-D-295-SM-P](#) [HDWM-36-57-S-D-415](#) [HDWM-25-57-G-D-290](#) [HDWM-25-58-G-D-355-SM](#) [HDWM-25-59-G-S-615-SM](#) [HDWM-25-59-S-D-310-SM-A](#) [HDWM-26-53-S-D-280-SM-A](#) [HDWM-30-58-G-D-550-SM](#) [HDWM-30-59-S-D-500-SM](#) [HDWM-33-53-G-D-280-SM-A](#) [HDWM-34-55-S-D-325-SM](#) [HDWM-35-56-G-D-300-SM](#) [HDWM-36-54-G-D-325-SM](#) [HDWM-36-54-S-D-250-SM-A-P](#) [HDWM-36-56-S-D-250-SM-LC-P](#) [HDWM-36-58-S-D-395-SM](#) [HDWM-36-59-S-D-250-SM](#) [HDWM-36-59-S-D-615-SM](#) [HDWM-40-59-S-D-450-SM](#) [HDWM-48-53-S-D-292-SM](#) [HDWM-25-59-S-D-503-SM](#) [HDWM-26-53-G-D-280-SM-A](#)