
HALOGEN

FREE

GREEN

<u>(5-2008)</u>






Commercial Thin Film Resistor, Surface-Mount Chip



For applications requiring low noise, stability, low temperature coefficient of resistance, and low voltage coefficient, all Vishay's proven precision thin film wraparound resistors will meet your exact requirements. Manufactured with the same material and processes as QPL and manufactured in a QPL facility. Additional custom lot screening per MIL-PRF-55342 available upon request. Contact product marketing for an estimate.

CONSTRUCTION



FEATURES

- Moisture resistant (SPM) special passivation method
- Non-standard values available
- Pre-tinned terminations over nickel barrier (gold available)
- Very low noise and voltage coefficient (< -35 dB, 0.1 ppm/V)
- Non-inductive
- Laser-trimmed tolerances to 0.02 %
- In-lot tracking less than 5 ppm/°C
- Epoxy bondable termination available
- Sulfur resistant (per ASTM B809-95 humid vapor test)
- Flame resistant UL 94 V-0
- Material categorization: for definitions of compliance please see www.vishav.com/doc?99912

Note

* This datasheet provides information about parts that are RoHS-compliant and / or parts that are non RoHS-compliant. For example, parts with lead (Pb) terminations are not RoHS-compliant. Please see the information / tables in this datasheet for details

TYPICAL PERFORMANCE

	ABSOLUTE
TCR	25
TOL.	0.1

TEST	SPECIFICATIONS	CONDITIONS
Material	Passivated nichrome	-
Resistance Range	10 Ω to 6.19 MΩ	-
TCR: Absolute	± 10 ppm/°C to 100 ppm/°C	-55 °C to +125 °C
Tolerance: Absolute	± 0.02 % to ± 5 %	+25 °C
Stability: Absolute	ΔR ± 0.02 %	2000 h at 70 °C
Stability: Ratio	-	-
Voltage Coefficient	0.1 ppm/V (typical)	-
Working Voltage	75 V to 200 V	-
Operating Temperature Range	-55 °C to +155 °C	-
Storage Temperature Range	-55 °C to +155 °C	-
Noise	< -35 dB (typical)	-
Shelf Life Stability: Absolute	$\Delta R \pm 0.01 \%$	1 year at +25 °C


COMPONENT RATINGS						
CASE SIZE (1) POWER RATING (mW) WOR	POWER RATING	WORKING VOLTAGE	RESISTANCE RANGE (Ω)			
	(V)	≥ 0.1 %	< 0.1 %			
0402	50	75	10 to 100K	250 to 100K		
0502	100	75	20 to 150K	250 to 150K		
0505	150	75	20 to 301K	250 to 301K		
0603	150	75	10 to 261K	250 to 261K		
0705	250	100	10 to 475K	250 to 475K		
0805	250	100	10 to 475K	250 to 475K		
1005	250	100	10 to 649K	250 to 649K		
1010	500	150	50 to 1M	250 to 1M		
1206	400	200	10 to 1.5M ⁽²⁾	250 to 1M		
1505	400	150	10 to 1M	250 to 1M		
2208	800	150	10 to 3.16M ⁽²⁾	250 to 1M		
2010	800	200	10 to 4.02M ⁽²⁾	250 to 1M		
2512	1000	200	10 to 6.19M ⁽²⁾	250 to 1M		

Notes


(1) 0705 and 0805 are the same (only use 0805 when ordering)

(2) Values > 1M best TCR ± 25 ppm/°C

Revision: 17-Dec-2021






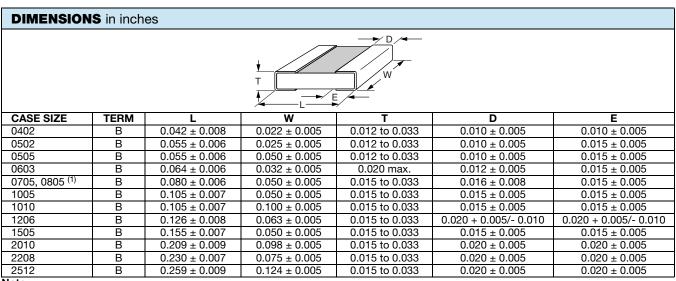


Note

^{(1) 0705} and 0805 are the same (only use 0805 when ordering)

ENVIRONMENTAL TESTS					
ENVIRONMENTAL TEST	10 kΩ Δ <i>R</i> ± (%)	100 kΩ ΔR ± (%)			
Thermal Shock	0.02	0.02			
Short Time Overload	0.01	0.01			
Low Temperature Operation	0.01	0.01			
Resistance to Solder Heat	0.04	0.03			
Moisture Resistance	0.02	0.01			
High Temperature Exposure	0.03	0.06			
Load Life (10 000 h, + 70 °C)	0.05	0.05			
TCR	± 25 ppm/°C	± 25 ppm/°C			

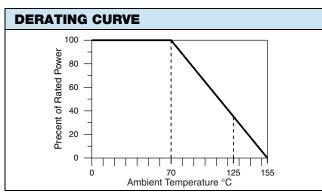

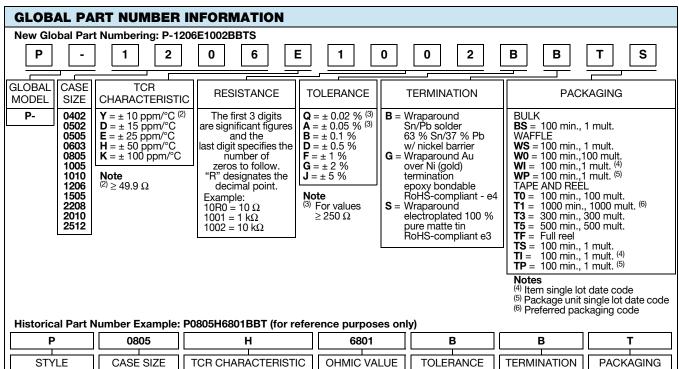



Legal Disclaimer Notice

Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Hyperlinks included in this datasheet may direct users to third-party websites. These links are provided as a convenience and for informational purposes only. Inclusion of these hyperlinks does not constitute an endorsement or an approval by Vishay of any of the products, services or opinions of the corporation, organization or individual associated with the third-party website. Vishay disclaims any and all liability and bears no responsibility for the accuracy, legality or content of the third-party website or for that of subsequent links.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Vishay:

P0505K39R2FBT P-0603E8000BBT1 P0603K45R3FBW P0805K8162DBT P0805Y2002BSW P0805Y6042BSW P1005Y5101FBT P1010E50R0BBT P1206H3243BBT P1206Y1002FBT P1206Y2003BSW P1206Y7501BSW P1206Y7503BSW P1206E2213FBT P1206Y4121PBT P-0805E1001BBT1 P0603K1002FBW P0603E4701FBT P1206E4991FBT P2208E1094BBW P1206K33R0FBT P2208H1094BBW P0402Y11K092QBW P0402Y12K666QBW P0402Y13K26QBW P0402Y18K575QBW P0402Y2K473QBW P0402Y2K482QBW P0402Y2K973QBW P0402Y25K748QBW P0402Y27K724QBW P0402Y28K66QBW P0402Y3K503QBW P0402Y3K705QBW P0402Y32K776QBW P0402Y32K896QBW P0402Y3430QBW P0402Y3600QBW P0402Y4K368QBW P0402Y4K542QBW P0402Y40R6QBW P0402Y5K043QBW P0402Y5K095QBW P0402Y5K726QBW P0402Y573R9QBW P0402Y60K732QBW P0402Y6550QBW P0402Y6800QBW P0402Y8K018QBW P0402Y840R6QBW P0402Y9K375QBW P0402Y9K468QBW P0402Y1K509QBW P0402Y1K601QBW P0402Y1K648QBW P0402Y1601QBW P0402Y2K164QBW P0402Y2K287QBW P-0505K4701JBT1 P-1206E1002BBWS P-1206E1151BBWS P-1206E1002BBT1 P-0603E8452BST1 P1206E2501BBTS P1206H1153FB P0805Y1002QBT P1206Y1003QBT P0505Y2493ABW P1206Y1962FB P-0603E1002BBT P-0603E1890BBT P-0603E4190BBT P-0603E70R5BBT P-0603E79R6BST P-0603H3321BBT P-0603Y1001BBT P-0805E1002BBT P-0805E1600BBT P-0805E20R0BBT P-0805E3200BBT P-0805E40R0BBT P-0805E49R9BBT5 P-0805H1001FBT P-0805H1002FBT P-0805H4423BBT P-0805H52R3FBT P-0805K3652BBT P-1206E1001BBT P-1206E3322BBT P-1206E4993BBT P-1206Y1004FBT P-1206Y3242BBT P-1206Y5111FBT P-0603Y6492DST P-0805E3651BBT P-0402E1001BBT P-0402E3012BBT P-0805Y1541BBT P-0805Y3161BBT P-0603E1001BBT