











SN74LVC07A

SCAS595W - OCTOBER 1997-REVISED OCTOBER 2016

# SN74LVC07A Hex Buffer and Driver With Open-Drain Outputs

### **Features**

- Operates From 1.65 V to 5 V
- Inputs and Open-Drain Outputs Accept Voltages Up to 5.5 V
- Max t<sub>pd</sub> of 2.6 ns at 5 V
- Latch-Up Performance Exceeds 250 mA Per JESD 17
- I<sub>off</sub> Supports Live Insertion, Partial-Power-Down Mode, and Back-Drive Protection

## 2 Applications

- **AV Receiver**
- Audio Dock: Portable
- Blu-ray Player and Home Theater
- MP3 Player or Recorder
- Personal Digital Assistant (PDA)
- Power: Telecom/Server AC/DC Supply: Single Controller: Analog and Digital
- Solid State Drive (SSD): Client and Enterprise
- TV: LCD, Digital, and High-Definition (HDTV)
- **Tablet: Enterprise**
- Video Analytics: Server
- Wireless Headset, Keyboard, and Mouse

## 3 Description

The SN74LVC07A device is a hex buffer and driver that is designed for 1.65-V to 5.5-V  $V_{CC}$  operation.

### Device Information<sup>(1)</sup>

PART NUMBER	PACKAGE	BODY SIZE (NOM)
SN74LVC07AD	SOIC (14)	8.65 mm × 3.91 mm
SN74LVC07ADB	SSOP (14)	6.20 mm × 5.30 mm
SN74LVC07ADGV	TVSOP (14)	3.60 mm × 4.40 mm
SN74LVC07APW	TSSOP (14)	5.00 mm × 4.40 mm
SN74LVC07ANS	SO (14)	10.30 mm × 5.30 mm
SN74LVC07ARGY	VQFN (14)	3.50 mm × 3.50 mm

(1) For all available packages, see the orderable addendum at the end of the data sheet.

#### **Simplified Schematic**



Copyright © 2016 Texas Instruments Incorporated



# **Table of Contents**

1	Features 1		8.1 Overview	12
2	Applications 1		8.2 Functional Block Diagram	12
3	Description 1		8.3 Feature Description	12
4	Revision History2		8.4 Device Functional Modes	12
5	Pin Configuration and Functions 4	9	Application and Implementation	
6	Specifications5		9.1 Application Information	13
•	6.1 Absolute Maximum Ratings5		9.2 Typical Application	13
	6.2 ESD Ratings	10	Power Supply Recommendations	14
	6.3 Recommended Operating Conditions	11	Layout	14
	6.4 Thermal Information		11.1 Layout Guidelines	14
	6.5 Electrical Characteristics—DC Limit Changes 6		11.2 Layout Example	15
	6.6 Switching Characteristics 6	12	Device and Documentation Support	16
	6.7 Operating Characteristics		12.1 Documentation Support	16
	6.8 Typical Characteristics		12.2 Receiving Notification of Documentation Update	es 16
7	Parameter Measurement Information 8		12.3 Community Resources	16
•	7.1 V <sub>CC</sub> = 1.8 V ± 0.15 V8		12.4 Trademarks	16
	7.2 V <sub>CC</sub> = 2.5 V ± 0.2 V9		12.5 Electrostatic Discharge Caution	16
	7.3 V <sub>CC</sub> = 2.7 and 3.3 V ± 0.3 V		12.6 Glossary	16
	7.4 V <sub>CC</sub> = 5 V ± 0.5 V	13	Mechanical, Packaging, and Orderable	
8	Detailed Description 12		Information	16

# 4 Revision History

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


Changes from Revision V (May 2015) to Revision W	Page
Changed Pin Functions table	4
Added Junction temperature to the Absolute Maximum Ratings table	5
Reformatted the Electrical Characteristics and the Switching Characteristics tables	6
Changed Typical Application Diagram	13
Added Receiving Notification of Documentation Updates section	16
Changes from Revision U (June 2014) to Revision V	Page
Changed Handling Ratings table to ESD Ratings table	5
Added industry standard terms to package designators in the <i>Thermal Information</i> table	6
Changed from "High" to "High-Z" in the Function Table	12

Cł	hanges from Revision T (February 2011) to Revision U	Page
	Updated document to new TI data sheet format	
•	Removed Ordering Information table	1
	Added Applications	
•	Added I <sub>off</sub> Features bullet	1
•	Added Device Information table	1
•	Added Handling Ratings table	5
•	Changed MAX operating free-air temperature from 85°C to 125°C	5
•	Updated Thermal Information table.	6
•	Added –40°C TO +125°C temperature range to <i>Electrical Characteristics</i> table	6
•	Added Switching Characteristics table for -40°C TO 125°C temperature range	6

Submit Documentation Feedback

Copyright © 1997–2016, Texas Instruments Incorporated







1A/1A/1A/	ŧi.	com


Copyright © 1997–2016, Texas Instruments Incorporated

Product Folder Links: SN74LVC07A




# 5 Pin Configuration and Functions

D, DB, DGV, NS, PW Package 14-Pin SOIC, SSOP, TVSOP, SO, TSSOP Top View



### RGY Package 14-Pin VQFN Top View



### **Pin Functions**

	PIN	I/O	DESCRIPTION
NO.	NAME	1/0	DESCRIPTION
1	1A	I	Input 1
2	1Y	0	Output 1
3	2A	1	Input 2
4	2Y	0	Output 2
5	3A	1	Input 3
6	3Y	0	Output 3
7	GND	_	Ground pin
8	4Y	0	Output 4
9	4A	1	Input 4
10	5Y	0	Output 5
11	5A	1	Input 5
12	6Y	0	Output 6
13	6A	I	Input 6
14	V <sub>CC</sub>	_	Power pin

Product Folder Links: SN74LVC07A

Submit Documentation Feedback

Copyright © 1997–2016, Texas Instruments Incorporated



## 6 Specifications

### 6.1 Absolute Maximum Ratings

over operating free-air temperature range (unless otherwise noted) (1)

			MIN	MAX	UNIT
$V_{CC}$	Supply voltage		-0.5	6.5	V
VI	Input voltage <sup>(2)</sup>		-0.5	6.5	V
Vo	Output voltage		-0.5	6.5	V
I <sub>IK</sub>	Input clamp current	V <sub>I</sub> < 0		-50	mA
I <sub>OK</sub>	Output clamp current	V <sub>O</sub> < 0		<b>-</b> 50	mA
Io	Continuous output current			±50	mA
	Continuous current through V <sub>CC</sub> or GND			±100	mA
Tj	Junction temperature			150	°C
T <sub>stg</sub>	Storage temperature		-65	150	°C

<sup>(1)</sup> Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under Recommended Operating Conditions is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

## 6.2 ESD Ratings

			VALUE	UNIT
		Human body model (HBM), per ANSI/ESDA/JEDEC JS-001 (1)	±4000	
١	V <sub>(ESD)</sub> Electrostatic discharge	Charged device model (CDM), per JEDEC specification JESD22-C101 (2)	±1500	V

<sup>(1)</sup> JEDEC document JEP155 states that 500-V HBM allows safe manufacturing with a standard ESD control process.

## **6.3 Recommended Operating Conditions**

over operating free-air temperature range (unless otherwise noted)(1)

			MIN	MAX	UNIT	
V <sub>CC</sub>	Supply voltage		1.65	5.5	V	
		V <sub>CC</sub> = 1.65 V to 1.95 V	0.65 × V <sub>CC</sub>			
\/	High lavel input values	$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$	1.7		V	
VIH	High-level input voltage	V <sub>CC</sub> = 2.7 V to 3.6 V	2		V	
V <sub>IH</sub> Hig V <sub>IL</sub> Lov V <sub>I</sub> Inp V <sub>O</sub> Ou		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$	$0.7 \times V_{CC}$			
	Low-level input voltage	V <sub>CC</sub> = 1.65 V to 1.95 V		$0.35 \times V_{CC}$		
V <sub>IL</sub>		$V_{CC} = 2.3 \text{ V to } 2.7 \text{ V}$		0.7	V	
		$V_{CC} = 2.7 \text{ V to } 3.6 \text{ V}$		0.8		
		$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V}$		$0.3 \times V_{CC}$		
VI	Input voltage		0	5.5	V	
Vo	Output voltage		0	5.5	V	
		V <sub>CC</sub> = 1.65 V		4		
		V <sub>CC</sub> = 2.3 V		12		
$I_{OL}$	Low-level output current	$V_{CC} = 2.7 \text{ V}$		12	mA	
		V <sub>CC</sub> = 3 V		24		
		V <sub>CC</sub> = 4.5 V		24		
T <sub>A</sub>	Operating free-air temperature		-40	125	°C	

All unused inputs of the device must be held at V<sub>CC</sub> or GND to ensure proper device operation. See Implications of Slow or Floating CMOS Inputs, SCBA004.

Product Folder Links: SN74LVC07A

<sup>(2)</sup> The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.

<sup>(2)</sup> JEDEC document JEP157 states that 250-V CDM allows safe manufacturing with a standard ESD control process.



### 6.4 Thermal Information

			SN74LVC07A					
THERMAL METRIC <sup>(1)</sup>		D (SOIC)	DB (SSOP)	DGV (TVSOP)	NS (SO)	PW (TSSOP)	RGY (VQFN)	UNIT
				14 P	INS			
$R_{\theta JA}$	Junction-to-ambient thermal resistance	177.4	135.1	157.7	120.3	160.3	80.6	°C/W
$R_{\theta JC(top)}$	Junction-to-case (top) thermal resistance	75.4	86.7	78.3	76.3	84.4	97.0	°C/W
$R_{\theta JB}$	Junction-to-board thermal resistance	70.6	82.4	90.8	79.0	102.1	56.7	°C/W
ΨЈТ	Junction-to-top characterization parameter	34.7	43.7	21.0	36.2	24.3	16.7	°C/W
ΨЈВ	Junction-to-board characterization parameter	70.4	81.9	90.1	78.7	101.4	56.8	°C/W
$R_{\theta JC(bot)}$	Junction-to-case (bottom) thermal resistance	n/a	n/a	n/a	n/a	n/a	35.8	°C/W

<sup>(1)</sup> For more information about traditional and new thermal metrics, see the Semiconductor and IC Package Thermal Metrics application report.

## 6.5 Electrical Characteristics—DC Limit Changes

 $T_A = -40$ °C to +125°C, unless otherwise noted

PARAMETER	TEST CONDITIONS	V <sub>cc</sub>	MIN TYP <sup>(1)</sup> MAX	UNIT
	I <sub>OL</sub> = 100 μA	1.65 V to 5.5 V	0.2	
	I <sub>OL</sub> = 4 mA	1.65 V	0.45	
V <sub>OL</sub>	1. 12 mA	2.3 V	0.7	V
	I <sub>OL</sub> = 12 mA	2.7 V	0.4	
	I <sub>OL</sub> = 24 mA	3 V	0.55	
I <sub>I</sub>	V <sub>I</sub> = 5.5 V or GND	3.6 V	±5	μA
l <sub>off</sub>	$V_I$ or $V_O = 5.5 \text{ V}$	0 V	±10	μA
Icc	$V_I = V_{CC}$ or GND, $I_O = 0$	3.6 V	10	μA
Δl <sub>CC</sub>	One input at $V_{CC} - 0.6 \text{ V}$ , Other inputs at $V_{CC}$ or GND	2.7 V to 3.6 V	500	μΑ
Ci	$V_I = V_{CC}$ or GND	3.3 V	5.0	pF

<sup>(1)</sup> All typical values are at  $V_{CC}$  = 3.3 V,  $T_A$  = 25°C.

## 6.6 Switching Characteristics

over recommended operating free-air temperature range (unless otherwise noted) (see Figure 3 through Figure 6)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	TEST C	ONDITIONS	MIN	MAX	UNIT											
				$V_{CC} = 1.8 \text{ V} \pm 0.15 \text{ V}$	1	5.6												
				$V_{CC} = 2.5 \text{ V} \pm 0.2 \text{ V}$	1	3.4												
			-40°C to 85°C	$V_{CC} = 2.7 \text{ V}$	1	3.3												
				$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$	1	3.6												
	Α	Υ		$V_{CC} = 5 V \pm 0.5 V$	1	2.6	no											
t <sub>pd</sub>	A	-40°C to 125°C	$V_{CC} = 1.8 \text{ V} \pm 0.15 \text{ V}$	1	6.1	ns												
															$V_{CC} = 2.5 \text{ V} \pm 0.2 \text{ V}$	1	3.9	
				-40°C to 125°C	$V_{CC} = 2.7 \text{ V}$	1	3.8											
				$V_{CC} = 3.3 \text{ V} \pm 0.3 \text{ V}$	1	4.1												
				$V_{CC} = 5 V \pm 0.5 V$	1	3.1												

Product Folder Links: SN74LVC07A





# 6.7 Operating Characteristics

 $T_A = 25^{\circ}C$ 

PARAMETER		TEST CONDITIONS	V <sub>CC</sub> = 1.8 V TYP	V <sub>CC</sub> = 2.5 V TYP	V <sub>CC</sub> = 3.3 V TYP	V <sub>CC</sub> = 5 V TYP	UNIT
C <sub>pd</sub>	Power dissipation capacitance per buffer and driver	f = 10 MHz	1.8	2	2.5	3.78	pF

# 6.8 Typical Characteristics

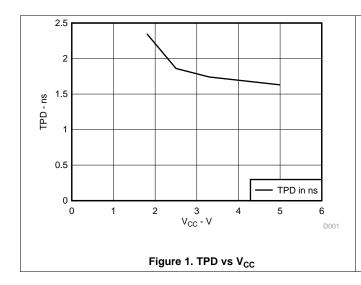









### 7 Parameter Measurement Information

## 7.1 $V_{CC} = 1.8 \text{ V} \pm 0.15 \text{ V}$










**PROPAGATION DELAY TIMES** 

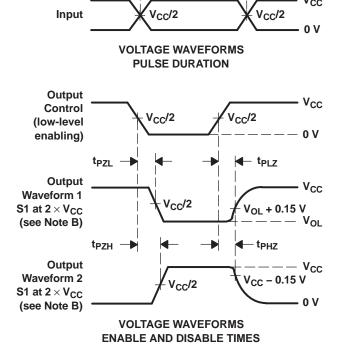


NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \ \Omega$ ,  $t_f \leq 2 \ ns$ ,  $t_f \leq 2 \ ns$ .
- D. The outputs are measured one at a time, with one transition per measurement.
- E. Since this device has open-drain outputs,  $t_{PLZ}$  and  $t_{PZL}$  are the same as  $t_{pd}$ .
- F. t<sub>PZL</sub> is measured at V<sub>CC</sub>/2.
- G.  $t_{PLZ}$  is measured at  $V_{OL}$  + 0.15 V.
- H. All parameters and waveforms are not applicable to all devices.

Figure 3. Load Circuit and Voltage Waveforms



## 7.2 $V_{CC} = 2.5 \text{ V} \pm 0.2 \text{ V}$

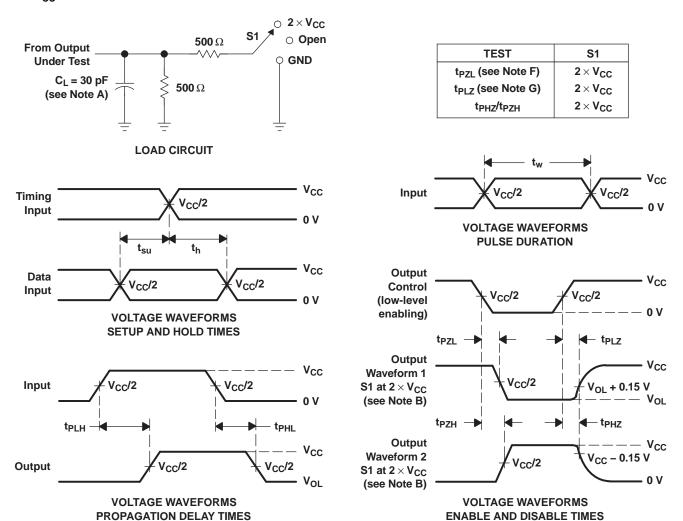


- NOTES: A. C<sub>L</sub> includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \ \Omega$ ,  $t_f \leq 2 \ ns$ ,  $t_f \leq 2 \ ns$ .
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E. Since this device has open-drain outputs,  $t_{PLZ}$  and  $t_{PZL}$  are the same as  $t_{pd}$ .
  - F. t<sub>PZL</sub> is measured at V<sub>CC</sub>/2.
  - G.  $t_{PLZ}$  is measured at  $V_{OL}$  + 0.15 V.
  - H. All parameters and waveforms are not applicable to all devices.

Figure 4. Load Circuit and Voltage Waveforms

Product Folder Links: SN74LVC07A



## 7.3 $V_{CC} = 2.7$ and 3.3 V $\pm$ 0.3 V

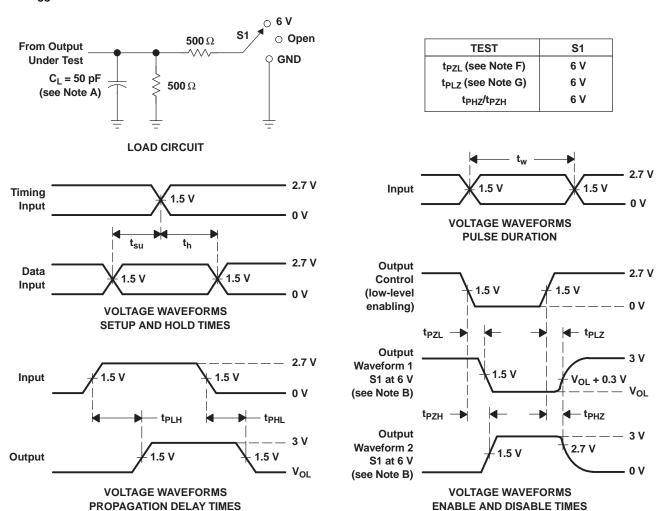


- NOTES: A. C<sub>I</sub> includes probe and jig capacitance.
  - B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
  - C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_Q = 50 \Omega$ ,  $t_r \leq 2.5 \text{ ns.}$
  - D. The outputs are measured one at a time, with one transition per measurement.
  - E. Since this device has open-drain outputs,  $t_{\text{PLZ}}$  and  $t_{\text{PZL}}$  are the same as  $t_{\text{pd}}$ .
  - F. t<sub>PZL</sub> is measured at 1.5 V.
  - G.  $t_{PLZ}$  is measured at  $V_{OL}$  + 0.3 V.
  - H. All parameters and waveforms are not applicable to all devices.


Figure 5. Load Circuit and Voltage Waveforms


Product Folder Links: SN74LVC07A



## 7.4 $V_{CC} = 5 V \pm 0.5 V$








 TEST
 S1

 t<sub>PZL</sub> (see Note F)
 2 x V<sub>CC</sub>

 t<sub>PLZ</sub> (see Note G)
 2 x V<sub>CC</sub>

 t<sub>PHZ</sub>/t<sub>PZH</sub>
 2 x V<sub>CC</sub>

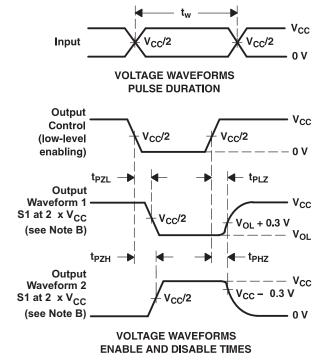

NOTES: A.  $C_L$  includes probe and jig capacitance.

- B. Waveform 1 is for an output with internal connections such that the output is low, except when disabled by the output control. Waveform 2 is for an output with internal connections such that the output is high, except when disabled by the output control.
- C. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10 MHz,  $Z_O = 50 \ \Omega$ ,  $t_f \leq$  2.5 ns,  $t_f \leq$  2.5 ns.
- D. The outputs are measured one at a time, with one transition per measurement.
- E. Since this device has open-drain outputs,  $\rm t_{PLZ}$  and  $\rm t_{PZL}$  are the same as  $\rm t_{pd}$
- F. t<sub>PZL</sub> is measured at V<sub>CC</sub>/2.
- G.  $t_{PLZ}$  is measured at  $V_{OL}$  + 0.3 V.
- H. All parameters and waveforms are not applicable to all devices.

Figure 6. Load Circuit and Voltage Waveforms

Copyright © 1997–2016, Texas Instruments Incorporated



## 8 Detailed Description

#### 8.1 Overview

The outputs of the SN74LVC07A device are open drain and can be connected to other open-drain outputs to implement active-low wired-OR or active-high wired-AND functions. The maximum sink current is 24 mA.

Inputs can be driven from 1.8-V, 2.5-V, 3.3-V (LVTTL), or 5-V (CMOS) devices. This feature allows the use of this device as translators in a mixed-system environment.

This device is fully specified for partial-power-down applications using  $I_{off}$ . The  $I_{off}$  circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

## 8.2 Functional Block Diagram



Copyright © 2016 Texas Instruments Incorporated

### 8.3 Feature Description

- · Wide operating voltage range
  - Operates from 1.65 V to 5.5 V
- Allows up or down voltage translation
  - Inputs and outputs accept voltages to 5.5 V
- I<sub>off</sub> feature
  - Allows voltages on the inputs and outputs when V<sub>CC</sub> is 0 V

## 8.4 Device Functional Modes

Table 1 lists the functional modes of the SN74LVC07A.

**Table 1. Function Table** 

INPUT A	OUTPUT Y
Н	Hi-Z
L	L

Product Folder Links: SN74LVC07A



## **Application and Implementation**


#### NOTE

Information in the following applications sections is not part of the TI component specification, and TI does not warrant its accuracy or completeness. TI's customers are responsible for determining suitability of components for their purposes. Customers should validate and test their design implementation to confirm system functionality.

### 9.1 Application Information

The SN74LVC07A device is a high-drive, open-drain CMOS device that can be used for a multitude of buffertype functions. It can produce 24 mA of drive current at 3.3 V. Therefore, this device is ideal for driving multiple inputs and for high-speed applications up to 100 MHz. The inputs and outputs are 5.5-V tolerant allowing the device to translate up to 5.5 V or down to  $V_{CC}$ .

## 9.2 Typical Application

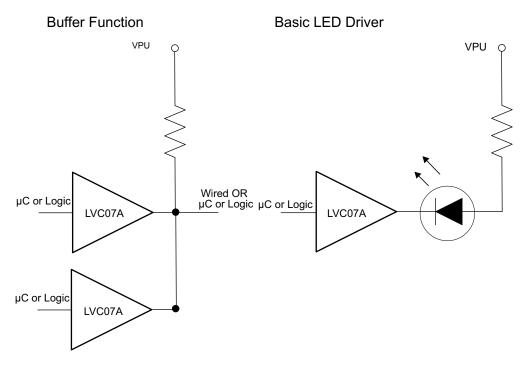

Copyright © 2016 Texas Instruments Incorporated

Figure 7. Typical Application Diagram

#### 9.2.1 Design Requirements

This device uses CMOS technology and has balanced output drive. Take care to avoid bus contention because it can drive currents that would exceed maximum limits. The high drive will also create fast edges into light loads; therefore, routing and load conditions must be considered to prevent ringing.

## 9.2.2 Detailed Design Procedure

- Recommended Input Conditions
  - Rise time and fall time specs: See  $(\Delta t/\Delta V)$  in the Recommended Operating Conditions table.
  - Specified high and low levels: See (V<sub>IH</sub> and V<sub>II</sub>) in the Recommended Operating Conditions table.

Product Folder Links: SN74LVC07A

- Inputs are overvoltage tolerant allowing them to go as high as 5.5 V at any valid V<sub>CC</sub>.
- 2. Recommended Output Conditions



### **Typical Application (continued)**

- Load currents must not exceed 25 mA per output and 50 mA total for the part.
- Outputs must not be pulled above 5.5 V.

### 9.2.3 Application Curve




Figure 8. I<sub>CC</sub> vs Frequency

## 10 Power Supply Recommendations

The power supply can be any voltage between the MIN and MAX supply voltage rating located in the *Recommended Operating Conditions* table.

Each  $V_{CC}$  pin must have a good bypass capacitor to prevent power disturbance. For devices with a single supply, 0.1  $\mu$ f is recommended; if there are multiple  $V_{CC}$  pins, then 0.01  $\mu$ f or 0.022  $\mu$ f is recommended for each power pin. It is acceptable to parallel multiple bypass caps to reject different frequencies of noise. A 0.1  $\mu$ f and a 1  $\mu$ f are commonly used in parallel. The bypass capacitor must be installed as close to the power pin as possible for best results.

### 11 Layout

## 11.1 Layout Guidelines

When using multiple bit logic devices inputs must never float.

In many cases, functions or parts of functions of digital logic devices are unused, for example, when only two inputs of a triple-input AND gate are used or only 3 of the 4 buffer gates are used. Such input pins must not be left unconnected because the undefined voltages at the outside connections result in undefined operational states. Figure 9 specifies the rules that must be observed under all circumstances. All unused inputs of digital logic devices must be connected to a high or low bias to prevent them from floating. The logic level that must be applied to any particular unused input depends on the function of the device. Generally they will be tied to GND or V<sub>CC</sub>, whichever makes more sense or is more convenient. It is generally acceptable to float outputs, unless the part is a transceiver.



# 11.2 Layout Example

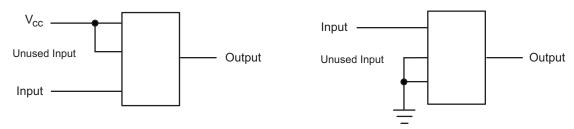


Figure 9. Layout Diagram

Copyright © 1997–2016, Texas Instruments Incorporated



## 12 Device and Documentation Support

### 12.1 Documentation Support

#### 12.1.1 Related Documentation

For related documentation see the following:

- Implications of Slow or Floating CMOS Inputs, SCBA004.
- Semiconductor and IC Package Thermal Metrics, SPRA953.

### 12.2 Receiving Notification of Documentation Updates

To receive notification of documentation updates, navigate to the device product folder on ti.com. In the upper right corner, click on *Alert me* to register and receive a weekly digest of any product information that has changed. For change details, review the revision history included in any revised document.

### 12.3 Community Resources

The following links connect to TI community resources. Linked contents are provided "AS IS" by the respective contributors. They do not constitute TI specifications and do not necessarily reflect TI's views; see TI's Terms of Use.

TI E2E™ Online Community TI's Engineer-to-Engineer (E2E) Community. Created to foster collaboration among engineers. At e2e.ti.com, you can ask questions, share knowledge, explore ideas and help solve problems with fellow engineers.

**Design Support** *TI's Design Support* Quickly find helpful E2E forums along with design support tools and contact information for technical support.

#### 12.4 Trademarks

E2E is a trademark of Texas Instruments.

All other trademarks are the property of their respective owners.

### 12.5 Electrostatic Discharge Caution



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

### 12.6 Glossary

SLYZ022 — TI Glossary.

This glossary lists and explains terms, acronyms, and definitions.

## 13 Mechanical, Packaging, and Orderable Information

The following pages include mechanical, packaging, and orderable information. This information is the most current data available for the designated devices. This data is subject to change without notice and revision of this document. For browser-based versions of this data sheet, refer to the left-hand navigation.

Product Folder Links: SN74LVC07A

www.ti.com

23-Oct-2025

## **PACKAGING INFORMATION**

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	<b>RoHS</b> (3)	Lead finish/ Ball material	MSL rating/ Peak reflow	Op temp (°C)	Part marking (6)
SN74LVC07AD	Active	Production	SOIC (D)   14	50   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07AD.B	Active	Production	SOIC (D)   14	50   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADBR	Active	Production	SSOP (DB)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07ADBR.B	Active	Production	SSOP (DB)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07ADE4	Active	Production	SOIC (D)   14	50   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADGVR	Active	Production	TVSOP (DGV)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07ADGVR.B	Active	Production	TVSOP (DGV)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07ADGVR1G4	Active	Production	TVSOP (DGV)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07ADGVR1G4.B	Active	Production	TVSOP (DGV)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07ADR	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU   SN	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADR.B	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADRG3	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADRG3.B	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADRG4	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADRG4.B	Active	Production	SOIC (D)   14	2500   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADT	Active	Production	SOIC (D)   14	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ADT.B	Active	Production	SOIC (D)   14	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ANSR	Active	Production	SOP (NS)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07ANSR.B	Active	Production	SOP (NS)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LVC07A
SN74LVC07APW	Active	Production	TSSOP (PW)   14	90   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APW.B	Active	Production	TSSOP (PW)   14	90   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWE4	Active	Production	TSSOP (PW)   14	90   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWG4	Active	Production	TSSOP (PW)   14	90   TUBE	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWR	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU   SN	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWR.B	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWRE4	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWRG3	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWRG3.B	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	SN	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWRG4	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A



-40 to 125

-40 to 125

23-Oct-2025

LC07A

LC07A



SN74LVC07ARGYR.B

SN74LVC07ARGYRG4

www.ti.com

Orderable part number	Status	Material type	Package   Pins	Package qty   Carrier	RoHS	Lead finish/	MSL rating/	Op temp (°C)	Part marking
	(1)	(2)			(3)	Ball material	Peak reflow		(6)
						(4)	(5)		
SN74LVC07APWRG4.B	Active	Production	TSSOP (PW)   14	2000   LARGE T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWT	Active	Production	TSSOP (PW)   14	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWT.B	Active	Production	TSSOP (PW)   14	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07APWTG4	Active	Production	TSSOP (PW)   14	250   SMALL T&R	Yes	NIPDAU	Level-1-260C-UNLIM	-40 to 125	LC07A
SN74LVC07ARGYR	Active	Production	VQFN (RGY)   14	3000   LARGE T&R	Yes	NIPDAU	Level-2-260C-1 YEAR	-40 to 125	LC07A

Yes

Yes

**NIPDAU** 

**NIPDAU** 

Level-2-260C-1 YEAR

Level-2-260C-1 YEAR

3000 | LARGE T&R

3000 | LARGE T&R

Active

Active

Production

Production

VQFN (RGY) | 14

VQFN (RGY) | 14

Multiple part markings will be inside parentheses. Only one part marking contained in parentheses and separated by a "~" will appear on a part. If a line is indented then it is a continuation of the previous line and the two combined represent the entire part marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

<sup>(1)</sup> Status: For more details on status, see our product life cycle.

<sup>(2)</sup> Material type: When designated, preproduction parts are prototypes/experimental devices, and are not yet approved or released for full production. Testing and final process, including without limitation quality assurance, reliability performance testing, and/or process qualification, may not yet be complete, and this item is subject to further changes or possible discontinuation. If available for ordering, purchases will be subject to an additional waiver at checkout, and are intended for early internal evaluation purposes only. These items are sold without warranties of any kind.

<sup>(3)</sup> RoHS values: Yes, No, RoHS Exempt. See the TI RoHS Statement for additional information and value definition.

<sup>(4)</sup> Lead finish/Ball material: Parts may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead finish/Ball material values may wrap to two lines if the finish value exceeds the maximum column width.

<sup>(5)</sup> MSL rating/Peak reflow: The moisture sensitivity level ratings and peak solder (reflow) temperatures. In the event that a part has multiple moisture sensitivity ratings, only the lowest level per JEDEC standards is shown. Refer to the shipping label for the actual reflow temperature that will be used to mount the part to the printed circuit board.

<sup>(6)</sup> Part marking: There may be an additional marking, which relates to the logo, the lot trace code information, or the environmental category of the part.

## PACKAGE OPTION ADDENDUM

www.ti.com 23-Oct-2025

#### OTHER QUALIFIED VERSIONS OF SN74LVC07A:

Automotive : SN74LVC07A-Q1

● Enhanced Product : SN74LVC07A-EP

NOTE: Qualified Version Definitions:

• Automotive - Q100 devices qualified for high-reliability automotive applications targeting zero defects

• Enhanced Product - Supports Defense, Aerospace and Medical Applications



www.ti.com 24-Oct-2025

## TAPE AND REEL INFORMATION





A0	Dimension designed to accommodate the component width
В0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

### QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE



#### \*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
SN74LVC07ADBR	SSOP	DB	14	2000	330.0	16.4	8.35	6.6	2.4	12.0	16.0	Q1
SN74LVC07ADGVR	TVSOP	DGV	14	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
SN74LVC07ADGVR1G4	TVSOP	DGV	14	2000	330.0	12.4	6.8	4.0	1.6	8.0	12.0	Q1
SN74LVC07ADR	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LVC07ADRG3	SOIC	D	14	2500	330.0	16.8	6.5	9.5	2.1	8.0	16.0	Q1
SN74LVC07ADRG4	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LVC07ADRG4	SOIC	D	14	2500	330.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LVC07ADT	SOIC	D	14	250	180.0	16.4	6.5	9.0	2.1	8.0	16.0	Q1
SN74LVC07ANSR	SOP	NS	14	2000	330.0	16.4	8.1	10.4	2.5	12.0	16.0	Q1
SN74LVC07APWR	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVC07APWRG3	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVC07APWRG4	TSSOP	PW	14	2000	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVC07APWT	TSSOP	PW	14	250	330.0	12.4	6.9	5.6	1.6	8.0	12.0	Q1
SN74LVC07ARGYR	VQFN	RGY	14	3000	330.0	12.4	3.75	3.75	1.15	8.0	12.0	Q1



www.ti.com 24-Oct-2025



\*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
Device	i ackage i ype	I ackage Drawing	1 1113	51 4	Length (min)	width (illin)	rieigiit (iiiii)
SN74LVC07ADBR	SSOP	DB	14	2000	353.0	353.0	32.0
SN74LVC07ADGVR	TVSOP	DGV	14	2000	353.0	353.0	32.0
SN74LVC07ADGVR1G4	TVSOP	DGV	14	2000	353.0	353.0	32.0
SN74LVC07ADR	SOIC	D	14	2500	353.0	353.0	32.0
SN74LVC07ADRG3	SOIC	D	14	2500	364.0	364.0	27.0
SN74LVC07ADRG4	SOIC	D	14	2500	340.5	336.1	32.0
SN74LVC07ADRG4	SOIC	D	14	2500	353.0	353.0	32.0
SN74LVC07ADT	SOIC	D	14	250	213.0	191.0	35.0
SN74LVC07ANSR	SOP	NS	14	2000	353.0	353.0	32.0
SN74LVC07APWR	TSSOP	PW	14	2000	353.0	353.0	32.0
SN74LVC07APWRG3	TSSOP	PW	14	2000	364.0	364.0	27.0
SN74LVC07APWRG4	TSSOP	PW	14	2000	353.0	353.0	32.0
SN74LVC07APWT	TSSOP	PW	14	250	353.0	353.0	32.0
SN74LVC07ARGYR	VQFN	RGY	14	3000	353.0	353.0	32.0

# **PACKAGE MATERIALS INFORMATION**

www.ti.com 24-Oct-2025

## **TUBE**



\*All dimensions are nominal

Device	Package Name	Package Type	Pins	SPQ	L (mm)	W (mm)	T (µm)	B (mm)
SN74LVC07AD	D	SOIC	14	50	506.6	8	3940	4.32
SN74LVC07AD.B	D	SOIC	14	50	506.6	8	3940	4.32
SN74LVC07ADE4	D	SOIC	14	50	506.6	8	3940	4.32
SN74LVC07APW	PW	TSSOP	14	90	530	10.2	3600	3.5
SN74LVC07APW.B	PW	TSSOP	14	90	530	10.2	3600	3.5
SN74LVC07APWE4	PW	TSSOP	14	90	530	10.2	3600	3.5
SN74LVC07APWG4	PW	TSSOP	14	90	530	10.2	3600	3.5

## DGV (R-PDSO-G\*\*)

## 24 PINS SHOWN

### **PLASTIC SMALL-OUTLINE**



NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15 per side.

D. Falls within JEDEC: 24/48 Pins – MO-153 14/16/20/56 Pins – MO-194





### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
  4. Reference JEDEC registration MO-150.





NOTES: (continued)

- 5. Publication IPC-7351 may have alternate designs.
- 6. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 7. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 8. Board assembly site may have different recommendations for stencil design.







### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.25 mm per side.
- 5. Reference JEDEC registration MO-153.





NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.





NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



3.5 x 3.5, 0.5 mm pitch

PLASTIC QUAD FLATPACK - NO LEAD

This image is a representation of the package family, actual package may vary. Refer to the product data sheet for package details.



INSTRUMENTS www.ti.com



PLASTIC QUAD FLATPACK - NO LEAD



### NOTES:

- 1. All linear dimensions are in millimeters. Any dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.
- This drawing is subject to change without notice.
   The package thermal pad must be soldered to the printed circuit board for thermal and mechanical performance.



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

4. This package is designed to be soldered to a thermal pad on the board. For more information, see Texas Instruments literature number SLUA271 (www.ti.com/lit/slua271).



PLASTIC QUAD FLATPACK - NO LEAD



NOTES: (continued)

5. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.





SMALL OUTLINE INTEGRATED CIRCUIT



### NOTES:

- 1. All linear dimensions are in millimeters. Dimensions in parenthesis are for reference only. Dimensioning and tolerancing per ASME Y14.5M.

  2. This drawing is subject to change without notice.

  3. This dimension does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not
- exceed 0.15 mm, per side.
- 4. This dimension does not include interlead flash. Interlead flash shall not exceed 0.43 mm, per side.
- 5. Reference JEDEC registration MS-012, variation AB.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

6. Publication IPC-7351 may have alternate designs.

7. Solder mask tolerances between and around signal pads can vary based on board fabrication site.



SMALL OUTLINE INTEGRATED CIRCUIT



NOTES: (continued)

- 8. Laser cutting apertures with trapezoidal walls and rounded corners may offer better paste release. IPC-7525 may have alternate design recommendations.
- 9. Board assembly site may have different recommendations for stencil design.



## **MECHANICAL DATA**

# NS (R-PDSO-G\*\*)

# 14-PINS SHOWN

## PLASTIC SMALL-OUTLINE PACKAGE



NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion, not to exceed 0,15.



### IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, regulatory or other requirements.

These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you fully indemnify TI and its representatives against any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale, TI's General Quality Guidelines, or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products. Unless TI explicitly designates a product as custom or customer-specified, TI products are standard, catalog, general purpose devices.

TI objects to and rejects any additional or different terms you may propose.

Copyright © 2025, Texas Instruments Incorporated

Last updated 10/2025