


CUSTOMER DRAWING

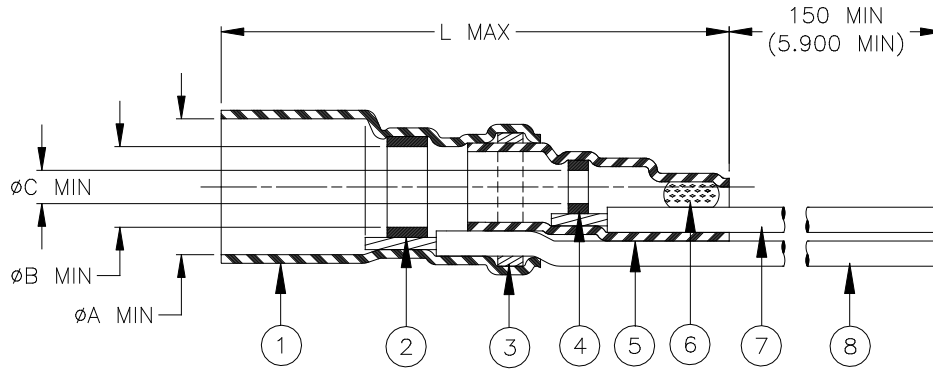

Product Name	Component Dimensions				"GA" Wire Gauge (AWG)	Cable Dimensions				
	L max	φA min	φB min	φC min		φD	φE	φF min	G±0.5 (G±0.02)	M±0.5 (M±0.02)
B-044-20-N	28.0 (1.100)	3.40 (0.135)	2.30 (0.090)	0.8 (0.030)	20	1.70 (0.065) to 3.40 (0.135)	1.30 (0.050) To 2.30 (0.090)	0.30 (0.012)	16.0 (0.630)	6.0 (0.235)
B-044-22-N					22					
B-044-24-N	24									
B-044-26-N	26									

NOTE: MATERIAL 6 DOES NOT APPLY ON B-044-20/22-N


MATERIALS

1. & 5. INSULATION SLEEVE: Heat-shrinkable, radiation cross-linked modified polyvinylidene fluoride. Transparent blue.
2. & 4. SOLDER PREFORMS WITH FLUX:
 SOLDER: TYPE Sn63 per ANSI J-STD-006.
 FLUX: TYPE ROL0 per ANSI J-STD-004.
3. & 6. MELTABLE RINGS: Thermally stabilized thermoplastic.
7. CONDUCTOR LEAD: RAYCHEM 55A0111 in accordance with MIL-W-22759/32, See Table for AWG. ETFE insulated, stranded tin plated copper.
 Color: white.
8. GROUND LEAD: RAYCHEM 55A0111 in accordance with MIL-W-22759/32. See Table for AWG. ETFE insulated, stranded tin plated copper.
 Color: blue.

APPLICATION

1. The parts covered by this SCD are for use in terminating the primary conductor and the braided shield of a coaxial cable having tin or silver plated conductor and shield, rated for at least 125° C and meeting the dimensional requirements listed.
2. Parts will meet the requirements of Raychem Specification RT-1404 when installed per Raychem RPIP-500-03.
3. Temperature range: -55°C to +150°C.


For best results, prepare the cable as shown:

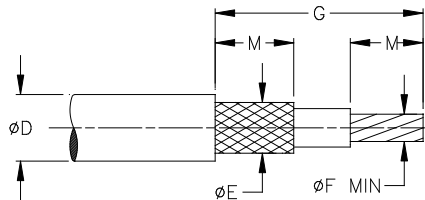

		Raychem Devices		TITLE: COAXIAL SOLDER SLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.:		
				B-044-GA-N		
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A		ANGLES: N/A ROUGHNESS IN MICRON		TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision : G
DRAWN BY: MALLIKA.D		CAGE CODE: 06090		DATE: 19-NOV-21		Issue Date : 01-DEC-2021
		ECN: ECN-21-128737		SCALE: NTS		SIZE: A
						SHEET: 1 of 1

CUSTOMER DRAWING

TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

		Raychem Devices		TITLE: COAXIAL SOLDERSLLEEVE DEVICE WITH PRE-INSTALLED STRANDED WIRE		
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]			DOCUMENT NO.: B-044-GA-N			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision : G	Issue Date : 01-DEC-2021	
DRAWN BY: MALLIKA.D	CAGE CODE: 06090	DATE: 19-NOV-21	ECN: ECN-21- 128737	SCALE: NTS	SIZE: A	SHEET: 2 of 1

© 2007-2016 TE Connectivity Ltd. Family of Companies. All Rights Reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[B-044-24-N](#) [B-106-1401](#) [B-044-26-N](#) [B-044-22-N](#) [B-040-24-N](#)